

Overload Relays

General data

Overview



Features	Benefits	3RU11	3RB20/3RB21	3RB22/3RB23
General data				
Sizes	<ul style="list-style-type: none"> Are coordinated with the dimensions, connections and technical characteristics of the other devices in the SIRIUS modular system (contactors, soft starters, ...) Permit the mounting of slim and compact load feeders in widths of 45 mm (S00), 45 mm (S0), 55 mm (S2), 70 mm (S3), 120 mm (S6) and 145 mm (S10/S12) Simplify configuration 	S00 ... S3	S00 ... S12	S00 ... S12
Seamless current range	<ul style="list-style-type: none"> Allows easy and consistent configuration with one series of overload relays (for small to large loads) 	0.11 ... 100 A	0.1 ... 630 A	0.3 ... 630 A (... 820 A) ¹⁾
Protection functions				
Tripping in the event of overload	<ul style="list-style-type: none"> Provides optimum inverse-time delayed protection of loads against excessive temperature rises due to overload 	✓	✓	✓
Tripping in the event of phase unbalance	<ul style="list-style-type: none"> Provides optimum inverse-time delayed protection of loads against excessive temperature rises due to phase unbalance 	(✓)	✓	✓
Tripping in the event of phase failure	<ul style="list-style-type: none"> Minimizes heating of induction motors during phase failure 	✓	✓	✓
Protection of single-phase loads	<ul style="list-style-type: none"> Enables the protection of single-phase loads 	✓	--	✓
Tripping in the event of overheating by integrated thermistor motor protection function	<ul style="list-style-type: none"> Provides optimum temperature-dependent protection of loads against excessive temperature rises, e.g. for stator-critical motors or in the event of insufficient coolant flow, contamination of the motor surface or for long starting or braking operations Eliminates the need for additional special equipment Saves space in the control cabinet Reduces wiring outlay and costs 	-- ²⁾	-- ²⁾	✓
Tripping in the event of a ground fault by internal ground-fault detection (activatable)	<ul style="list-style-type: none"> Provides optimum protection of loads against high-resistance short-circuits or ground faults due to moisture, condensed water, damage to the insulation material, etc. Eliminates the need for additional special equipment Saves space in the control cabinet Reduces wiring outlay and costs 	--	✓ (only 3RB21)	✓
Features				
RESET function	<ul style="list-style-type: none"> Allows manual or automatic resetting of the relay 	✓	✓	✓
Remote RESET function	<ul style="list-style-type: none"> Allows the remote resetting of the relay 	✓ (by means of separate module)	✓ (only 3RB21 with 24 V DC)	✓
TEST function for auxiliary contacts	<ul style="list-style-type: none"> Allows easy checking of the function and wiring 	✓	✓	✓
TEST function for electronics	<ul style="list-style-type: none"> Allows checking of the electronics 	--	✓	✓
Status display	<ul style="list-style-type: none"> Displays the current operating state 	✓	✓	✓
Large current adjustment button	<ul style="list-style-type: none"> Makes it easier to set the relay exactly to the correct current value 	✓	✓	✓
Integrated auxiliary contacts (1 NO + 1 NC)	<ul style="list-style-type: none"> Allows the load to be switched off if necessary Can be used to output signals 	✓	✓	✓ (2 ×)

¹⁾ Motor currents up to 820 A can be recorded and evaluated by a current measuring module, e.g. 3RB29 06-2BG1 (0.3 ... 3 A), in combination with a 3UF18 68-3GA00 (820 A / 1 A) series transformer.
For 3UF18 transformers see Chapter 7, "Monitoring and Control Devices" --> "SIMOCODE 3UF Motor Management and Control Devices".

²⁾ The SIRIUS 3RN thermistor motor protection devices can be used to provide additional temperature-dependent protection.

✓ = Available
-- = Not available



Features	Benefits	3RU11	3RB20/3RB21	3RB22/3RB23
Design of load feeders				
Short-circuit strength up to 100 kA at 690 V (in conjunction with the corresponding fuses or the corresponding motor starter protector)	<ul style="list-style-type: none"> Provides optimum protection of the loads and operating personnel in the event of short-circuits due to insulation faults or faulty switching operations 	✓	✓	✓
Electrical and mechanical matching to 3RT1 contactors	<ul style="list-style-type: none"> Simplifies configuration Reduces wiring outlay and costs Enables stand-alone installation as well as space-saving direct mounting 	✓	✓	✓ ¹⁾
Straight-through transformers for main circuit²⁾ (in this case the cables are routed through the feed-through openings of the overload relay and connected directly to the box terminals of the contactor)	<ul style="list-style-type: none"> Reduces the contact resistance (only one point of contact) Saves wiring costs (easy, no need for tools, and fast) Saves material costs Reduces installation costs 	--	✓ (S2 ... S6)	✓ (S00 ... S6)
Spring-type terminal connection system for main circuit²⁾	<ul style="list-style-type: none"> Enables fast connections Permits vibration-resistant connections Enables maintenance-free connections 	✓ (S00)	--	--
Spring-type terminal connection system for auxiliary circuits²⁾	<ul style="list-style-type: none"> Enables fast connections Permits vibration-resistant connections Enables maintenance-free connections 	✓	✓	✓
Other features				
Temperature compensation	<ul style="list-style-type: none"> Allows the use of the relays at high temperatures without derating Prevents premature tripping Allows compact installation of the control cabinet without distance between the devices/load feeders Simplifies configuration Enables space to be saved in the control cabinet 	✓	✓	✓
Very high long-term stability	<ul style="list-style-type: none"> Provides safe protection for the loads even after years of use in severe operating conditions 	(✓)	✓	✓
Wide setting ranges	<ul style="list-style-type: none"> Reduce the number of variants Minimize the engineering outlay and costs Minimize storage overhead, storage costs, tied-up capital 	--	✓ (1:4)	✓ (1:10)
Trip class CLASS 5	<ul style="list-style-type: none"> Enables solutions for very fast starting motors requiring special protection (e. g. Ex motors) 	--	✓ (only 3RB21)	✓
Trip classes > CLASS 10	<ul style="list-style-type: none"> Enables heavy starting solutions 	--	✓	✓
Low power loss	<ul style="list-style-type: none"> Reduces power consumption and energy costs (up 98 % less power is used than for thermal overload relays). Minimizes temperature rises of the contactor and control cabinet – in some cases this may eliminate the need for controlgear cabinet cooling. Direct mounting to contactor saves space, even for high motor currents (i. e. no heat decoupling is required). 	--	✓	✓

¹⁾ Exception: up to size S3, only stand-alone installation is possible.

²⁾ Alternatively available for screw terminals.

✓ = Available

-- = Not available

Overload Relays

General data



Features	Benefits	3RU11	3RB20/3RB21	3RB22/3RB23
Other features				
Internal power supply	<ul style="list-style-type: none"> Eliminates the need for configuration and connecting an additional control circuit 	-- ¹⁾	✓	--
Variable adjustment of the trip classes (The required trip class can be adjusted by means of a rotary switch depending on the current start-up condition.)	<ul style="list-style-type: none"> Reduces the number of variants Minimizes the configuring outlay and costs Minimizes storage overhead, storage costs, and tied-up capital 	--	✓ (only 3RB21)	✓
Overload warning	<ul style="list-style-type: none"> Indicates imminent tripping of the relay directly on the device due to overload, phase unbalance or phase failure Allows the imminent tripping of the relay to be signaled Allows measures to be taken in time in the event of continuous inverse-time delayed overloads Eliminates the need for an additional device Saves space in the control cabinet Reduces wiring outlay and costs 	--	--	✓
Analog output	<ul style="list-style-type: none"> Allows the output of an analog output signal for actuating moving-coil instruments, feeding programmable logic controllers or transfer to bus systems Eliminates the need for an additional measuring transducer and signal converter Saves space in the control cabinet Reduces wiring outlay and costs 	--	--	✓

¹⁾ The SIRIUS 3RU11 thermal overload relays use a bimetal contactor and therefore do not require a control supply voltage.

✓ = Available

-- = Not available

General data

Overload relays	Current measurement	Current range	Contactors (type, size, rating in kW)							
			3RT10 1	3RT10 2	3RT10 3	3RT10 4	3RT10 5	3RT10 6	3RT10 7	3TF68/3TF69
Type	Type	A	S00	S0	S2	S3	S6	S10	S12	Size 14
			3/4/5.5	5.5/7.5/11	15/18.5/22	30/37/45	55/75/90	110/132/160	200/250	375/450

SIRIUS 3RU11 thermal overload relays



3RU11 1	Integrated	0.11 ... 12	✓	--	--	--	--	--	--	--
3RU11 2	Integrated	1.8 ... 25	--	✓	--	--	--	--	--	--
3RU11 3	Integrated	5.5 ... 50	--	--	✓	--	--	--	--	--
3RU11 4	Integrated	18 ... 100	--	--	--	✓	--	--	--	--

SIRIUS 3RB20 solid-state overload relays¹⁾

3RB20 1	Integrated	0.1 ... 12	✓	--	--	--	--	--	--	--
3RB20 2	Integrated	0.1 ... 25	--	✓	--	--	--	--	--	--
3RB20 3	Integrated	6 ... 50	--	--	✓	--	--	--	--	--
3RB20 4	Integrated	12.5 ... 100	--	--	--	✓	--	--	--	--
3RB20 5	Integrated	50 ... 200	--	--	--	--	✓	--	--	--
3RB20 6	Integrated	55 ... 630	--	--	--	--	--	✓	✓	✓
3RB20 1 + 3UF18	Integrated	630 ... 820	--	--	--	--	--	--	--	✓

SIRIUS 3RB21 solid-state overload relays¹⁾

3RB21 1	Integrated	0.1 ... 12	✓	--	--	--	--	--	--	--
3RB21 2	Integrated	0.1 ... 25	--	✓	--	--	--	--	--	--
3RB21 3	Integrated	6 ... 50	--	--	✓	--	--	--	--	--
3RB21 4	Integrated	12.5 ... 100	--	--	--	✓	--	--	--	--
3RB21 5	Integrated	50 ... 200	--	--	--	--	✓	--	--	--
3RB21 6	Integrated	55 ... 630	--	--	--	--	--	✓	✓	✓
3RB21 1 + 3UF18	Integrated	630 ... 820	--	--	--	--	--	--	--	✓

SIRIUS 3RB22/3RB23 solid-state overload relays¹⁾

3RB22/3RB23 +	3RB29 0	0.3 ... 25	✓	✓	--	--	--	--	--	--
	3RB29 0	10 ... 100	--	--	✓	✓	--	--	--	--
	3RB29 5	20 ... 200	--	--	--	--	✓	--	--	--
	3RB29 6	63 ... 630	--	--	--	--	--	✓	✓	✓
	3RB29 0 + 3UF18	630 ... 820	--	--	--	--	--	--	--	✓

¹⁾ "Technical Specifications" for use of the overload relays with trip Class \geq CLASS 20 can be found under "Short-circuit protection with fuses for motor feeders", see the note on Technical Information on page 5/1; and in the project planning aid "Configuring SIRIUS Fuseless Load Feeders".

✓ = Can be used
-- = Cannot be used

Connection methods

The 3RB20 and 3RB21 relays are available with screw terminals (box terminals) or spring-type terminals on the auxiliary current side; the same applies for the evaluation modules of the 3RB22/3RB23 relays. The 3RU11 relays come with screw terminals.



Screw terminals



Spring-type terminals or Cage Clamp terminals


The terminals are indicated in the selection and ordering data by orange backgrounds.

Overload Relays

SIRIUS 3RU1 Thermal Overload Relays

3RU11 for standard applications

Overview

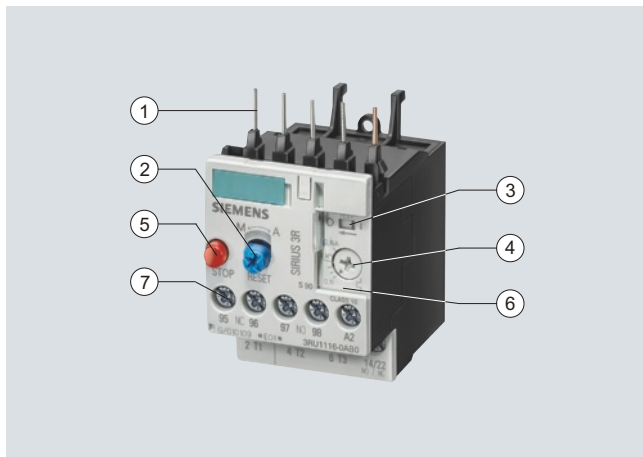

- ① Connection for mounting onto contactors:
Optimally adapted in electrical, mechanical and design terms to the contactors. Connecting pins can be used for direct mounting of the overload relays. Stand-alone installation is possible as an alternative (in some cases in conjunction with a stand-alone installation module).
- ② Selector switch for manual/automatic RESET and RESET button:
With this switch you can choose between manual and automatic RESET. A device set to manual RESET can be reset locally by pressing the RESET button. A remote RESET is possible using the RESET modules (accessories), which are independent of size.
- ③ Switch position indicator and TEST function of the wiring:
Indicates a trip and enables the wiring test.
- ④ Motor current setting:
Setting the device to the rated motor current is easy with the large rotary knob.
- ⑤ STOP button:
If the STOP button is pressed, the NC contact is opened. This switches off the contactor downstream. The NC contact is closed again when the button is released.
- ⑥ Transparent, sealable cover:
Secures the motor current setting and the TEST function against adjustment.
- ⑦ Supply terminals:
The generously sized terminals permit connection of two conductors with different cross-sections for the main and auxiliary circuits. The auxiliary circuit can be connected with screw terminals and alternatively with spring-type terminals.

The 3RU11 thermal overload relays up to 100 A have been designed for inverse-time delayed protection of loads with normal starting (for "Function" see note on [Technical Information on page 5/1](#)) against excessive temperature rises due to overload or phase failure.

An overload or phase failure results in an increase of the motor current beyond the set rated motor current. Via heating elements, this current rise heats up the bimetal strips inside the device which then bend and as a result trigger the auxiliary contacts by means of a tripping mechanism. The auxiliary contacts then switch off the load by means of a contactor. The break time depends on the ratio between the tripping current and set current I_d and is stored in the form of a long-term stable tripping characteristic (for "Characteristic Curves" see the note on [Technical Information on page 5/1](#)).

The "tripped" status is signaled by means of a switch position indicator. Resetting takes place either manually or automatically after a recovery time has elapsed (for "Function" see note on [Technical Information on page 5/1](#)).

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials.

They comply with all important worldwide standards and approvals.

"Increased safety" type of protection EEx e according to ATEX directive 94/9/EC

The 3RU11 thermal overload relays are suitable for the overload protection of explosion-proof motors with "increased safety" type of protection EEx e. The relays meet the requirements of EN 60079-7 (Electrical apparatus for areas subject to explosion hazards – Increased safety "e");
see [Chapter 20 "Appendix" --> "Standards and approvals"](#)
--> "Type overview of approved devices for explosion-protected areas (ATEX Explosion Protection)".

EC type test certificate for Category (2) G/D exists. It has the number DMT 98 ATEX G 001.

Benefits

The most important features and benefits of the 3RU11 thermal overload relays are listed in the overview table (see ["General Data" on page 5/42](#)).

Application

Industries

The 3RU11 thermal overload relays are suitable for customers from all industries who want to guarantee optimum inverse-time delayed protection of their electrical loads (e. g. motors) under normal starting conditions (CLASS 10).

Application

The 3RU11 thermal overload relays have been designed for the protection of three-phase and single-phase AC and DC motors.

If single-phase AC or DC loads are to be protected by the 3RU11 thermal overload relays, all three bimetal strips must be heated. For this purpose, all main current paths of the relay must be connected in series.

Ambient conditions

The 3RU11 thermal overload relays have temperature compensation in accordance with IEC 60947-4-1 for the temperature range of -20 °C to $+60\text{ °C}$. For temperatures from $+60\text{ °C}$ to $+80\text{ °C}$ the upper set value of the setting range must be reduced by the factor listed in the table below.

Ambient temperature in °C	Derating factor for the upper set value
+60	1.0
+65	0.94
+70	0.87
+75	0.81
+80	0.73

Accessories

The following optional accessories are available for the 3RU11 thermal overload relays:

- For the four overload relay sizes S00 to S3 one terminal bracket each for stand-alone installation
- One mechanical RESET module for all sizes
- One cable release for resetting devices which are difficult to access (for all sizes)
- One electrical remote RESET module in three voltage variants for all sizes
- Terminal covers

Overload Relays

SIRIUS 3RU1 Thermal Overload Relays






3RU11 for standard applications

Selection and ordering data

3RU11 thermal overload relays with screw terminals on the auxiliary current side for direct mounting¹⁾, CLASS 10

Features and technical specifications:

- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function
- STOP button
- Integrated, sealable cover

		Size of con- tactor ²⁾	Rating for induction motor rated value ³⁾	Current setting of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordi- nation 2, gL/gG opera- tional class ⁴⁾	DT	Screw terminals (on auxiliary current side)		PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
			kW	A	A		Order No.	Price per PU				kg
Size S00												
 3RU11 16-..B0	S00	0.04	0.11 ... 0.16	0.5	▶		3RU11 16-0AB0		1	1 unit	101	0.150
		0.06	0.14 ... 0.2	1	▶		3RU11 16-0BB0		1	1 unit	101	0.150
		0.06	0.18 ... 0.25	1	▶		3RU11 16-0CB0		1	1 unit	101	0.150
		0.09	0.22 ... 0.32	1.6	▶		3RU11 16-0DB0		1	1 unit	101	0.150
	0.09	0.28 ... 0.4	2	▶		3RU11 16-0EB0		1	1 unit	101	0.150	
	0.12	0.35 ... 0.5	2	▶		3RU11 16-0FB0		1	1 unit	101	0.150	
	0.18	0.45 ... 0.63	2	▶		3RU11 16-0GB0		1	1 unit	101	0.150	
	0.18	0.55 ... 0.8	4	▶		3RU11 16-0HB0		1	1 unit	101	0.150	
	0.25	0.7 ... 1	4	▶		3RU11 16-0JB0		1	1 unit	101	0.150	
	0.37	0.9 ... 1.25	4	▶		3RU11 16-0KB0		1	1 unit	101	0.150	
	0.55	1.1 ... 1.6	6	▶		3RU11 16-1AB0		1	1 unit	101	0.150	
	0.75	1.4 ... 2	6	▶		3RU11 16-1BB0		1	1 unit	101	0.150	
	0.75	1.8 ... 2.5	10	▶		3RU11 16-1CB0		1	1 unit	101	0.150	
	1.1	2.2 ... 3.2	10	▶		3RU11 16-1DB0		1	1 unit	101	0.150	
	1.5	2.8 ... 4	16	▶		3RU11 16-1EB0		1	1 unit	101	0.150	
	1.5	3.5 ... 5	20	▶		3RU11 16-1FB0		1	1 unit	101	0.150	
2.2	4.5 ... 6.3	20	▶		3RU11 16-1GB0		1	1 unit	101	0.150		
3	5.5 ... 8	25	▶		3RU11 16-1HB0		1	1 unit	101	0.150		
4	7 ... 10	35	▶		3RU11 16-1JB0		1	1 unit	101	0.150		
5.5	9 ... 12	35	▶		3RU11 16-1KB0		1	1 unit	101	0.150		
Size S0												
 3RU11 26-..B0	S0	0.75	1.8 ... 2.5	10	▶		3RU11 26-1CB0		1	1 unit	101	0.190
		1.1	2.2 ... 3.2	10	▶		3RU11 26-1DB0		1	1 unit	101	0.190
		1.5	2.8 ... 4	16	▶		3RU11 26-1EB0		1	1 unit	101	0.190
		1.5	3.5 ... 5	20	▶		3RU11 26-1FB0		1	1 unit	101	0.190
	2.2	4.5 ... 6.3	20	▶		3RU11 26-1GB0		1	1 unit	101	0.190	
	3	5.5 ... 8	25	▶		3RU11 26-1HB0		1	1 unit	101	0.190	
	4	7 ... 10	35	▶		3RU11 26-1JB0		1	1 unit	101	0.190	
	5.5	9 ... 12.5	35	▶		3RU11 26-1KB0		1	1 unit	101	0.190	
	7.5	11 ... 16	40	▶		3RU11 26-4AB0		1	1 unit	101	0.190	
	7.5	14 ... 20	50	▶		3RU11 26-4BB0		1	1 unit	101	0.190	
	11	17 ... 22	63	▶		3RU11 26-4CB0		1	1 unit	101	0.190	
	11	20 ... 25	63	▶		3RU11 26-4DB0		1	1 unit	101	0.190	
	3	5.5 ... 8	25	▶		3RU11 36-1HB0		1	1 unit	101	0.320	
	4	7 ... 10	35	▶		3RU11 36-1JB0		1	1 unit	101	0.320	
	5.5	9 ... 12.5	35	▶		3RU11 36-1KB0		1	1 unit	101	0.320	
	7.5	11 ... 16	40	▶		3RU11 36-4AB0		1	1 unit	101	0.320	
7.5	14 ... 20	50	▶		3RU11 36-4BB0		1	1 unit	101	0.320		
11	18 ... 25	63	▶		3RU11 36-4DB0		1	1 unit	101	0.320		
15	22 ... 32	80	▶		3RU11 36-4EB0		1	1 unit	101	0.320		
18.5	28 ... 40	80	▶		3RU11 36-4FB0		1	1 unit	101	0.320		
22	36 ... 45	100	▶		3RU11 36-4GB0		1	1 unit	101	0.320		
22	40 ... 50	100	▶		3RU11 36-4HB0		1	1 unit	101	0.320		
Size S2												
 3RU11 36-..B0	S2	3	5.5 ... 8	25	▶		3RU11 36-1HB0		1	1 unit	101	0.320
		4	7 ... 10	35	▶		3RU11 36-1JB0		1	1 unit	101	0.320
		5.5	9 ... 12.5	35	▶		3RU11 36-1KB0		1	1 unit	101	0.320
		7.5	11 ... 16	40	▶		3RU11 36-4AB0		1	1 unit	101	0.320
	7.5	14 ... 20	50	▶		3RU11 36-4BB0		1	1 unit	101	0.320	
	11	18 ... 25	63	▶		3RU11 36-4DB0		1	1 unit	101	0.320	
	15	22 ... 32	80	▶		3RU11 36-4EB0		1	1 unit	101	0.320	
	18.5	28 ... 40	80	▶		3RU11 36-4FB0		1	1 unit	101	0.320	
	22	36 ... 45	100	▶		3RU11 36-4GB0		1	1 unit	101	0.320	
	22	40 ... 50	100	▶		3RU11 36-4HB0		1	1 unit	101	0.320	
	11	18 ... 25	63	▶		3RU11 46-4DB0		1	1 unit	101	0.550	
	15	22 ... 32	80	▶		3RU11 46-4EB0		1	1 unit	101	0.550	
	18.5	28 ... 40	80	▶		3RU11 46-4FB0		1	1 unit	101	0.550	
	22	36 ... 50	125	▶		3RU11 46-4HB0		1	1 unit	101	0.550	
	30	45 ... 63	125	▶		3RU11 46-4JB0		1	1 unit	101	0.550	
	37	57 ... 75	160	▶		3RU11 46-4KB0		1	1 unit	101	0.550	
45	70 ... 90	160	▶		3RU11 46-4LB0		1	1 unit	101	0.550		
45	80 ... 100 ⁵⁾	200	▶		3RU11 46-4MB0		1	1 unit	101	0.550		
Size S3												
 3RU11 46-..B0	S3	11	18 ... 25	63	▶		3RU11 46-4DB0		1	1 unit	101	0.550
		15	22 ... 32	80	▶		3RU11 46-4EB0		1	1 unit	101	0.550
		18.5	28 ... 40	80	▶		3RU11 46-4FB0		1	1 unit	101	0.550
		22	36 ... 50	125	▶		3RU11 46-4HB0		1	1 unit	101	0.550
	30	45 ... 63	125	▶		3RU11 46-4JB0		1	1 unit	101	0.550	
	37	57 ... 75	160	▶		3RU11 46-4KB0		1	1 unit	101	0.550	
	45	70 ... 90	160	▶		3RU11 46-4LB0		1	1 unit	101	0.550	
	45	80 ... 100 ⁵⁾	200	▶		3RU11 46-4MB0		1	1 unit	101	0.550	

¹⁾ With the suitable terminal brackets (see "Accessories", page 5/50), the 3RU11 overload relays for direct mounting can also be installed as stand-alone units.

²⁾ Observe maximum rated operational current of the devices.

³⁾ Guide value for 4-pole standard motors at AC 50 Hz 400 V. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

⁴⁾ Maximum protection by fuse for overload relay, type of coordination 2.

For fuse values in conjunction with contactors, see "Technical specifications" --> "Short-circuit protection with fuses/motor starter protectors for motor feeders", see note on Technical Information on page 5/1.

⁵⁾ For overload relays > 100 A, see 3RB2.

Overload Relays

SIRIUS 3RU1 Thermal Overload Relays





3RU11 for standard applications

3RU11 thermal overload relays with screw terminals on the auxiliary current side for stand-alone installation¹⁾, CLASS 10

Features and technical specifications:

- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET

- Switch position indicator
- TEST function
- STOP button
- Integrated, sealable cover

Size of con- tactor ²⁾		Rating for induction motor rated value ³⁾	Current setting of the inverse- time delayed overload release	Short-circuit protection with fuse, type of coord- ination 2, gL/gG opera- tional class ⁴⁾	DT	Screw terminals (on auxiliary current side)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
						Order No.				
		kW	A	A						kg
Size S00										
	S00	0.04	0.11 ... 0.16	0.5	B	3RU11 16-0AB1	1	1 unit	101	0.180
		0.06	0.14 ... 0.2	1	B	3RU11 16-0BB1	1	1 unit	101	0.180
		0.06	0.18 ... 0.25	1	B	3RU11 16-0CB1	1	1 unit	101	0.180
		0.09	0.22 ... 0.32	1.6	B	3RU11 16-0DB1	1	1 unit	101	0.180
	0.09	0.28 ... 0.4	2	▶	3RU11 16-0EB1	1	1 unit	101	0.180	
	0.12	0.35 ... 0.5	2	▶	3RU11 16-0FB1	1	1 unit	101	0.180	
	0.18	0.45 ... 0.63	2	▶	3RU11 16-0GB1	1	1 unit	101	0.180	
	0.18	0.55 ... 0.8	4	▶	3RU11 16-0HB1	1	1 unit	101	0.180	
	0.25	0.7 ... 1	4	▶	3RU11 16-0JB1	1	1 unit	101	0.180	
	0.37	0.9 ... 1.25	4	▶	3RU11 16-0KB1	1	1 unit	101	0.180	
	0.55	1.1 ... 1.6	6	▶	3RU11 16-1AB1	1	1 unit	101	0.180	
	0.75	1.4 ... 2	6	▶	3RU11 16-1BB1	1	1 unit	101	0.180	
	0.75	1.8 ... 2.5	10	▶	3RU11 16-1CB1	1	1 unit	101	0.180	
	1.1	2.2 ... 3.2	10	▶	3RU11 16-1DB1	1	1 unit	101	0.180	
	1.5	2.8 ... 4	16	▶	3RU11 16-1EB1	1	1 unit	101	0.180	
	1.5	3.5 ... 5	20	▶	3RU11 16-1FB1	1	1 unit	101	0.180	
2.2	4.5 ... 6.3	20	▶	3RU11 16-1GB1	1	1 unit	101	0.180		
3	5.5 ... 8	25	▶	3RU11 16-1HB1	1	1 unit	101	0.180		
4	7 ... 10	35	▶	3RU11 16-1JB1	1	1 unit	101	0.180		
5.5	9 ... 12	35	▶	3RU11 16-1KB1	1	1 unit	101	0.180		
Size S0										
	S0	7.5	11 ... 16	40	▶	3RU11 26-4AB1	1	1 unit	101	0.240
		7.5	14 ... 20	50	▶	3RU11 26-4BB1	1	1 unit	101	0.240
		11	17 ... 22	63	▶	3RU11 26-4CB1	1	1 unit	101	0.240
		11	20 ... 25	63	▶	3RU11 26-4DB1	1	1 unit	101	0.240
Size S2										
	S2	15	22 ... 32	80	▶	3RU11 36-4EB1	1	1 unit	101	0.480
		18.5	28 ... 40	80	▶	3RU11 36-4FB1	1	1 unit	101	0.480
		22	36 ... 45	100	▶	3RU11 36-4GB1	1	1 unit	101	0.480
		22	40 ... 50	100	▶	3RU11 36-4HB1	1	1 unit	101	0.480
Size S3										
	S3	30	45 ... 63	125	▶	3RU11 46-4JB1	1	1 unit	101	0.810
		37	57 ... 75	160	▶	3RU11 46-4KB1	1	1 unit	101	0.810
		45	70 ... 90	160	▶	3RU11 46-4LB1	1	1 unit	101	0.810
		45	80 ... 100 ⁵⁾	200	▶	3RU11 46-4MB1	1	1 unit	101	0.810






Overload Relays

SIRIUS 3RU1 Thermal Overload Relays

3RU11 for standard applications
3RU11 thermal overload relays with Cage Clamp terminals for direct mounting¹⁾ and stand-alone installation²⁾, CLASS 10

Features and technical specifications:

- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function
- STOP button
- Integrated, sealable cover

	Size of con- tactor ³⁾	Rating for induction motor rated value ⁴⁾	Current setting of the inverse- time delayed overload release	Short-circuit protection with fuse, type of coordi- nation 2, gL/gG opera- tional class ⁵⁾	DT	Cage Clamp terminals (on auxiliary current side) Order No.	 Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	kW	A	A								kg
Size S00 for stand-alone installation ⁶⁾											
 3RU11 16-..C1	S00	0.04	0.11 ... 0.16	0.5	B	3RU11 16-0AC1		1	1 unit	101	0.190
		0.06	0.14 ... 0.2	1	B	3RU11 16-0BC1		1	1 unit	101	0.190
		0.06	0.18 ... 0.25	1	B	3RU11 16-0CC1		1	1 unit	101	0.190
		0.09	0.22 ... 0.32	1.6	B	3RU11 16-0DC1		1	1 unit	101	0.190
		0.09	0.28 ... 0.4	2	B	3RU11 16-0EC1		1	1 unit	101	0.190
		0.12	0.35 ... 0.5	2	B	3RU11 16-0FC1		1	1 unit	101	0.190
		0.18	0.45 ... 0.63	2	▶	3RU11 16-0GC1		1	1 unit	101	0.190
		0.18	0.55 ... 0.8	4	▶	3RU11 16-0HC1		1	1 unit	101	0.190
		0.25	0.7 ... 1	4	▶	3RU11 16-0JC1		1	1 unit	101	0.190
		0.37	0.9 ... 1.25	4	▶	3RU11 16-0KC1		1	1 unit	101	0.190
		0.55	1.1 ... 1.6	6	▶	3RU11 16-1AC1		1	1 unit	101	0.190
		0.75	1.4 ... 2	6	▶	3RU11 16-1BC1		1	1 unit	101	0.190
		0.75	1.8 ... 2.5	10	C	3RU11 16-1CC1		1	1 unit	101	0.190
		1.1	2.2 ... 3.2	10	▶	3RU11 16-1DC1		1	1 unit	101	0.190
		1.5	2.8 ... 4	16	B	3RU11 16-1EC1		1	1 unit	101	0.190
		1.5	3.5 ... 5	20	▶	3RU11 16-1FC1		1	1 unit	101	0.190
		2.2	4.5 ... 6.3	20	▶	3RU11 16-1GC1		1	1 unit	101	0.190
		3	5.5 ... 8	25	▶	3RU11 16-1HC1		1	1 unit	101	0.190
		4	7 ... 10	35	▶	3RU11 16-1JC1		1	1 unit	101	0.190
		5.5	9 ... 12	35	▶	3RU11 16-1KC1		1	1 unit	101	0.190
Size S0 for direct mounting ¹⁷⁾											
 3RU11 16-..D0	S0	0.75	1.8 ... 2.5	10	B	3RU11 26-1CD0		1	1 unit	101	0.190
		1.1	2.2 ... 3.2	10	B	3RU11 26-1DD0		1	1 unit	101	0.190
		1.5	2.8 ... 4	16	B	3RU11 26-1ED0		1	1 unit	101	0.190
		1.5	3.5 ... 5	20	B	3RU11 26-1FD0		1	1 unit	101	0.190
		2.2	4.5 ... 6.3	20	B	3RU11 26-1GD0		1	1 unit	101	0.190
		3	5.5 ... 8	25	B	3RU11 26-1HD0		1	1 unit	101	0.190
		4	7 ... 10	35	B	3RU11 26-1JD0		1	1 unit	101	0.190
		5.5	9 ... 12.5	35	B	3RU11 26-1KD0		1	1 unit	101	0.190
		7.5	11 ... 16	40	▶	3RU11 26-4AD0		1	1 unit	101	0.190
		7.5	14 ... 20	50	▶	3RU11 26-4BD0		1	1 unit	101	0.190
		11	17 ... 22	63	▶	3RU11 26-4CD0		1	1 unit	101	0.190
		11	20 ... 25	63	▶	3RU11 26-4DD0		1	1 unit	101	0.190
Size S2 for direct mounting ¹⁷⁾											
 3RU11 36-..D0	S2	3	5.5 ... 8	25	B	3RU11 36-1HD0		1	1 unit	101	0.320
		4	7 ... 10	35	B	3RU11 36-1JD0		1	1 unit	101	0.320
		5.5	9 ... 12.5	35	B	3RU11 36-1KD0		1	1 unit	101	0.320
		7.5	11 ... 16	40	B	3RU11 36-4AD0		1	1 unit	101	0.320
		7.5	14 ... 20	50	B	3RU11 36-4BD0		1	1 unit	101	0.320
		11	18 ... 25	63	B	3RU11 36-4DD0		1	1 unit	101	0.320
		15	22 ... 32	80	▶	3RU11 36-4ED0		1	1 unit	101	0.320
		18.5	28 ... 40	80	▶	3RU11 36-4FD0		1	1 unit	101	0.320
		22	36 ... 45	100	▶	3RU11 36-4GD0		1	1 unit	101	0.320
		22	40 ... 50	100	▶	3RU11 36-4HD0		1	1 unit	101	0.320
Size S3 for direct mounting ¹⁷⁾											
 3RU11 46-..D0	S3	11	18 ... 25	63	B	3RU11 46-4DD0		1	1 unit	101	0.550
		15	22 ... 32	80	B	3RU11 46-4ED0		1	1 unit	101	0.550
		18.5	28 ... 40	80	B	3RU11 46-4FD0		1	1 unit	101	0.550
		22	36 ... 50	125	B	3RU11 46-4HD0		1	1 unit	101	0.550
		30	45 ... 63	125	▶	3RU11 46-4JD0		1	1 unit	101	0.550
		37	57 ... 75	160	▶	3RU11 46-4KD0		1	1 unit	101	0.550
		45	70 ... 90	160	▶	3RU11 46-4LD0		1	1 unit	101	0.550
		45	80 ... 100	200	▶	3RU11 46-4MD0		1	1 unit	101	0.550

¹⁾ With the suitable terminal brackets (see "Accessories", page 5/50), the 3RU11 overload relays for direct mounting can also be installed as stand-alone units.

²⁾ Size S00 for screw and snap-on mounting onto TH 35 standard mounting rail.

³⁾ Observe maximum rated operational current of the devices.

⁴⁾ Guide value for 4-pole standard motors at AC 50 Hz 400 V. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

⁵⁾ Maximum protection by fuse for overload relay, type of coordination 2.

For fuse values in conjunction with contactors, see "Technical specifications" --> "Short-circuit protection with fuses/motor starter protectors for motor feeders", see note on Technical Information on page 5/1.

⁶⁾ Auxiliary and main conductor connections with Cage Clamp terminal.

⁷⁾ Auxiliary conductor connections with Cage Clamp terminals and main conductor connections with screw terminals.

Overload Relays

SIRIUS 3RU1 Thermal Overload Relays





Accessories

Overview

The following optional accessories are available for the 3RU11 thermal overload relays:

- For the four overload relay sizes S00 to S3 one terminal bracket each for stand-alone installation
- One mechanical RESET module for all sizes
- One cable release for resetting devices which are difficult to access (for all sizes)
- One electrical remote RESET module in three voltage variants for all sizes
- Terminal covers

Selection and ordering data

Version	Size	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Terminal brackets for stand-alone installation								
	For separate mounting of overload relays; screw and snap-on mounting onto TH 35 standard mounting rail; size S3 also for TH 75 standard mounting rail	S00	▶ 3RU19 16-3AA01		1	1 unit	101	0.060
		S0	▶ 3RU19 26-3AA01		1	1 unit	101	0.080
		S2	▶ 3RU19 36-3AA01		1	1 unit	101	0.180
		S3	▶ 3RU19 46-3AA01		1	1 unit	101	0.280
Mechanical RESET¹⁾								
	Resetting plungers, holders and formers	S00 ... S3	▶ 3RU19 00-1A		1	1 unit	101	0.038
	Pushbuttons with extended stroke (12 mm), IP65, Ø 22 mm	B	3SB30 00-0EA11		1	1 unit	102	0.020
	Extension plungers For compensation of the distance between the pushbutton and the unlatching button of the relay	A	3SX1 335		1	1 unit	102	0.004
Cable releases with holder for RESET¹⁾								
	For Ø 6.5 mm holes in the control panel; max. control panel thickness 8 mm	S00 ... S3						
	• Length 400 mm	▶	3RU19 00-1B		1	1 unit	101	0.063
	• Length 600 mm	▶	3RU19 00-1C		1	1 unit	101	0.073
Modules for remote RESET, electrical								
	Operating range	24 ... 30 V	S00 ... S3	▶ 3RU19 00-2AB71	1	1 unit	101	0.066
	0.85 ... 1.1 x U _N	110 ... 127 V		▶ 3RU19 00-2AF71	1	1 unit	101	0.067
	power consumption	AC 80 VA, DC 70 W		▶ 3RU19 00-2AM71	1	1 unit	101	0.066
Terminal covers¹⁾								
	Covers for cable lugs and busbar connections							
	• Length 55 mm	S3	▶ 3RT19 46-4EA1		1	1 unit	101	0.040
	Covers for box terminals							
	• Length 20.6 mm	S2	▶ 3RT19 36-4EA2		1	1 unit	101	0.020
	• Length 20.8 mm	S3	▶ 3RT19 46-4EA2		1	1 unit	101	0.025

For more accessories (screwdrivers and labeling plates), see page 5/62.


¹⁾ The accessories are identical to those of the 3RB2 solid-state overload relays.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

3RB20, 3RB21 for standard applications

Overview

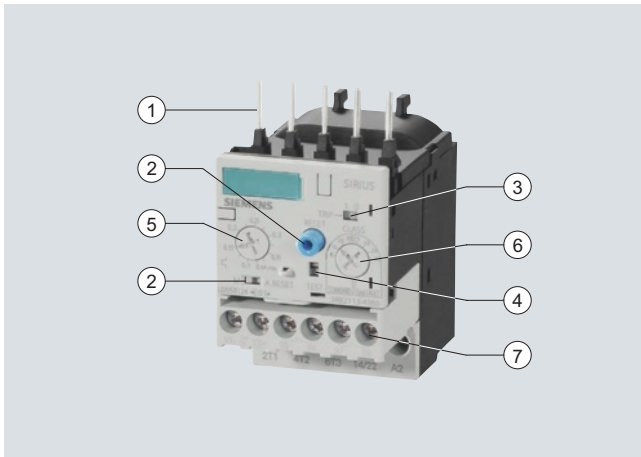

- ① Connection for mounting onto contactors:
Optimally adapted in electrical, mechanical and design terms to the contactors and soft starters. Connecting pins can be used for direct mounting of the overload relays. Stand-alone installation is possible as an alternative (in some cases in conjunction with a stand-alone installation module).
- ② Selector switch for manual/automatic RESET and RESET button:
With the slide switch you can choose between manual and automatic RESET. A device set to manual RESET can be reset locally by pressing the RESET button. On the 3RB21 a solid-state remote RESET is integrated.
- ③ Switch position indicator and TEST function of the wiring:
Indicates a trip and enables the wiring test.
- ④ Solid-state test (device test):
Enables a test of all important device components and functions.
- ⑤ Motor current setting:
Setting the device to the rated motor current is easy with the large rotary knob.
- ⑥ Trip class setting/internal ground-fault detection (only 3RB21):
Using the rotary switch you can set the required trip class and activate the internal ground-fault detection dependent on the start-up conditions.
- ⑦ Connecting terminals (removable joint block for auxiliary circuits):
The generously sized terminals permit connection of two conductors with different cross-sections for the main and auxiliary circuits. The auxiliary circuit can be connected with screw terminals and alternatively with spring-type terminals.

The 3RB20 and 3RB21 solid-state overload relays up to 630 A with internal power supply have been designed for inverse-time delayed protection of loads with normal and heavy starting (for "Function" see note on Technical Information on page 5/1) against excessive temperature rises due to overload, phase unbalance or phase failure.

An overload, phase unbalance or phase failure result in an increase of the motor current beyond the set rated motor current. This current rise is detected by the current transformers integrated into the devices and evaluated by corresponding solid-state circuits which then output a pulse to the auxiliary contacts. The auxiliary contacts then switch off the load by means of a contactor. The break time depends on the ratio between the tripping current and set current I_e and is stored in the form of a long-term stable tripping characteristic (for "Characteristic Curves" see the note on Technical Information on page 5/1).

In addition to inverse-time delayed protection of loads against excessive temperature rises due to overload, phase unbalance and phase failure, the 3RB21 solid-state overload relays also allow internal ground-fault detection (not possible in conjunction with contactor assemblies for wye-delta starting). This provides protection of loads against high-resistance short-circuits due to damage to the insulation material, moisture, condensed water etc.

The "tripped" status is signaled by means of a switch position indicator. Resetting takes place either manually or automatically after a recovery time has elapsed (for "Function" see note on Technical Information on page 5/1).

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials. They comply with all important worldwide standards and approvals.

"Increased safety" type of protection EEx e according to ATEX directive 94/9/EC

The 3RB20/3RB21 solid-state overload relays are suitable for the overload protection of explosion-proof motors with "increased safety" type of protection EEx e. The relays meet the requirements of EN 60079-7 (Electrical apparatus for areas subject to explosion hazards – Increased safety "e"); see Chapter 20 "Appendix" --> "Standards and approvals" --> "Type overview of approved devices for explosion-protected areas (ATEX Explosion Protection)".

EC type test certificate for Group II, Category (2) G/D exists. It has the number PTB 06 ATEX 3001.

Benefits

The most important features and benefits of the 3RB20/3RB21 solid-state overload relays are listed in the overview table (see "General Data" on page 5/42).

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

3RB20, 3RB21 for standard applications

Application

Industries

The 3RB20/3RB21 solid-state overload relays are suitable for customers from all industries who want to guarantee optimum inverse-time delayed protection of their electrical loads (e. g. motors) under normal and heavy starting conditions (CLASS 5 to CLASS 30), minimize project completion times, inventories and power consumption, and optimize plant availability and maintenance management.

Application

The 3RB20/3RB21 solid-state overload relays have been designed for the protection of induction motors in sinusoidal 50/60 Hz voltage networks. The relays are not suitable for the protection of single-phase AC or DC loads.

The 3RU11 thermal overload relay or the 3RB22/3RB23 solid-state overload relay can be used for single-phase AC loads. For DC loads we recommend the 3RU11 thermal overload relay.

Ambient conditions

The devices are insensitive to external influences such as shocks, corrosive environments, ageing and temperature fluctuation.

For the temperature range from -25 °C to $+60\text{ °C}$, the 3RB20/3RB21 solid-state overload relays compensate the temperature according to IEC 60947-4-1.

For the 3RB20/3RB21 solid-state overload relays with the sizes S6, S10 and S12, the upper set value of the setting range must be reduced for ambient temperatures $> 50\text{ °C}$ by a certain factor (see tables below).

Type	Setting range	Derating factor for the upper set value for stand-alone installation at ambient temperature	
		+50 °C	+60 °C
3RB20 56, 3RB21 56	50 ... 200 A	100 %	100 %
3RB20 66, 3RB21 66	55 ... 250 A	100 %	100 %
3RB20 66, 3RB21 66	160 ... 630 A	100 %	90 %

Type	Setting range	Derating factor for the upper set value for mounting onto contactor at ambient temperature	
		+50 °C	+60 °C
3RB20 56, 3RB21 56	50 ... 200 A	100 %	70 %
3RB20 66, 3RB21 66	55 ... 250 A	100 %	70 %
3RB20 66, 3RB21 66	160 ... 630 A	100 %	70 %

Accessories

The following optional accessories are available for the 3RB20/3RB21 solid-state overload relays:

- One terminal bracket each for the overload relays size S00 and S0 (sizes S2 to S12 can be installed as stand-alone installation without a terminal bracket)
- One mechanical remote RESET module for all sizes
- One cable release for resetting devices which are difficult to access (for all sizes)
- One sealable cover for all sizes
- Terminal covers for sizes S2 to S10/S12
- Box terminal blocks for sizes S6 and S10/S12

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

3RB20, 3RB21 for standard applications

Selection and ordering data

3RB20 solid-state overload relays for direct mounting¹⁾²⁾ and stand-alone installation²⁾³⁾, CLASS 10

Features and technical specifications:

- Overload protection, phase failure protection and unbalance protection
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function and self-monitoring

 PU (UNIT, SET, M)= 1
 PS* = 1 unit
 PG = 101


Size of contactor ⁴⁾	Rating for induction motor Rated value ⁵⁾	Current setting of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination 2, gL/gG operational class ⁶⁾	DT	Screw terminals (on auxiliary current side)	Weight per PU approx.	DT	Spring-type terminals (on auxiliary current side)	Weight per PU approx.
	kW	A	A		Order No.	Price per PU		Order No.	Price per PU
						kg			kg
Size S00¹⁾									
S00	0.04 ... 0.09	0.1 ... 0.4	1	▶	3RB20 16-1RB0	0.200 A		3RB20 16-1RD0	0.200
	0.12 ... 0.37	0.32 ... 1.25	2	▶	3RB20 16-1NB0	0.200 A		3RB20 16-1ND0	0.200
	0.55 ... 1.5	1 ... 4	10	▶	3RB20 16-1PB0	0.200 A		3RB20 16-1PD0	0.200
	1.1 ... 5.5	3 ... 12	20	▶	3RB20 16-1SB0	0.200 A		3RB20 16-1SD0	0.200
Size S0¹⁾									
S0	0.04 ... 0.09	0.1 ... 0.4	1	▶	3RB20 26-1RB0	0.220 A		3RB20 26-1RD0	0.220
	0.12 ... 0.37	0.32 ... 1.25	2	▶	3RB20 26-1NB0	0.220 A		3RB20 26-1ND0	0.220
	0.55 ... 1.5	1 ... 4	10	▶	3RB20 26-1PB0	0.220 A		3RB20 26-1PD0	0.220
	1.1 ... 5.5	3 ... 12	20	▶	3RB20 26-1SB0	0.220 A		3RB20 26-1SD0	0.220
	3 ... 11	6 ... 25	35	▶	3RB20 26-1QB0	0.220 A		3RB20 26-1QD0	0.220
Size S2¹⁾³⁾⁷⁾									
S2	3 ... 11	6 ... 25	63	▶	3RB20 36-1QB0	0.360 A		3RB20 36-1QD0	0.360
				▶	3RB20 36-1QW1	0.230 A		3RB20 36-1QX1	0.230
	7.5 ... 22	12.5 ... 50	80	▶	3RB20 36-1UB0	0.360 A		3RB20 36-1UD0	0.360
				▶	3RB20 36-1UW1	0.230 A		3RB20 36-1UX1	0.230
Size S3¹⁾³⁾⁷⁾									
S3	7.5 ... 22	12.5 ... 50	160	▶	3RB20 46-1UB0	0.560 A		3RB20 46-1UD0	0.560
	11 ... 45	25 ... 100	315	▶	3RB20 46-1EB0	0.560 A		3RB20 46-1ED0	0.560
				▶	3RB20 46-1EW1	0.450 A		3RB20 46-1EX1	0.450
Size S6²⁾⁷⁾									
S6 with busbar connections	22 ... 90	50 ... 200	315	▶	3RB20 56-1FC2	1.030 A		3RB20 56-1FF2	1.030
S6 with box terminals				▶	3RB20 56-1FW2	0.690 A		3RB20 56-1FX2	0.690
Size S10/S12²⁾									
S10/S12	22 ... 110	55 ... 250	400	▶	3RB20 66-1GC2	1.820 A		3RB20 66-1GF2	1.820
and size 14 (3TF68/ 3TF69)	90 ... 450	160 ... 630	800	▶	3RB20 66-1MC2	1.820 A		3RB20 66-1MF2	1.820

¹⁾ The relays with an Order No. ending with "0" are designed for direct mounting. With the matching terminal brackets (see "Accessories", page 5/60) the sizes S00 and S0 can also be installed as stand-alone units.

²⁾ The relays with an Order No. ending with "2" are designed for direct mounting and stand-alone installation. For 3TF68/3TF69 contactors, direct mounting is not possible.

³⁾ The relays with an Order No. ending with "1" are designed for stand-alone installation.

⁴⁾ Observe maximum rated operational current of the devices.

⁵⁾ Guide value for 4-pole standard motors at AC 50 Hz 400 V. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

⁶⁾ Maximum protection by fuse for overload relay, type of coordination 2. For fuse values in conjunction with contactors, see "Technical specifications" --> "Short-circuit protection with fuses for motor feeders", see note on Technical Information on page 5/1.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

3RB20, 3RB21 for standard applications

3RB20 solid-state overload relays for direct mounting¹⁾²⁾ and stand-alone installation²⁾³⁾, CLASS 20

Features and technical specifications:

- Overload protection, phase failure protection and unbalance protection
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function and self-monitoring

PU (UNIT, SET, M)= 1
PS* = 1 unit
PG = 101



Size of contactor ⁴⁾	Rating for induction motor Rated value ⁵⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination 2, gL/gG operational class ⁶⁾	DT	Screw terminals (on auxiliary current side)	Weight per PU approx.	DT	Spring-type terminals (on auxiliary current side)	Weight per PU approx.
	kW	A	A		Order No.	Price per PU		Order No.	Price per PU
						kg			kg
Size S00¹⁾									
S00	0.04 ... 0.09	0.1 ... 0.4	1	▶	3RB20 16-2RB0	0.200 A		3RB20 16-2RD0	0.200
	0.12 ... 0.37	0.32 ... 1.25	2	▶	3RB20 16-2NB0	0.200 A		3RB20 16-2ND0	0.200
	0.55 ... 1.5	1 ... 4	10	▶	3RB20 16-2PB0	0.200 A		3RB20 16-2PD0	0.200
	1.1 ... 5.5	3 ... 12	20	▶	3RB20 16-2SB0	0.200 A		3RB20 16-2SD0	0.200
Size S0¹⁾									
S0	0.04 ... 0.09	0.1 ... 0.4	1	▶	3RB20 26-2RB0	0.220 A		3RB20 26-2RD0	0.220
	0.12 ... 0.37	0.32 ... 1.25	2	▶	3RB20 26-2NB0	0.220 A		3RB20 26-2ND0	0.220
	0.55 ... 1.5	1 ... 4	10	▶	3RB20 26-2PB0	0.220 A		3RB20 26-2PD0	0.220
	1.1 ... 5.5	3 ... 12	20	▶	3RB20 26-2SB0	0.220 A		3RB20 26-2SD0	0.220
	3 ... 11	6 ... 25	35	▶	3RB20 26-2QB0	0.220 A		3RB20 26-2QD0	0.220
Size S2¹⁾³⁾⁷⁾									
S2	3 ... 11	6 ... 25	63	▶	3RB20 36-2QB0	0.360 A		3RB20 36-2QD0	0.360
				▶	3RB20 36-2QW1	0.230 A		3RB20 36-2QX1	0.230
	7.5 ... 22	12.5 ... 50	80	▶	3RB20 36-2UB0	0.360 A		3RB20 36-2UD0	0.360
				▶	3RB20 36-2UW1	0.230 A		3RB20 36-2UX1	0.230
Size S3¹⁾³⁾⁷⁾									
S3	7.5 ... 22	12.5 ... 50	160	▶	3RB20 46-2UB0	0.560 A		3RB20 46-2UD0	0.560
	11 ... 45	25 ... 100	315	▶	3RB20 46-2EB0	0.560 A		3RB20 46-2ED0	0.560
				▶	3RB20 46-2EW1	0.450 A		3RB20 46-2EX1	0.450
Size S6²⁾⁷⁾									
S6 with busbar connections	22 ... 90	50 ... 200	315	▶	3RB20 56-2FC2	1.030 A		3RB20 56-2FF2	1.030
S6 with box terminals				▶	3RB20 56-2FW2	0.690 A		3RB20 56-2FX2	0.690
Size S10/S12²⁾									
S10/S12	22 ... 110	55 ... 250	400	▶	3RB20 66-2GC2	1.820 A		3RB20 66-2GF2	1.820
and size 14 (3TF68/3TF69)	90 ... 450	160 ... 630	800	▶	3RB20 66-2MC2	1.820 A		3RB20 66-2MF2	1.820

¹⁾ The relays with an Order No. ending with "0" are designed for direct mounting. With the matching terminal brackets (see "Accessories", page 5/60) the sizes S00 and S0 can also be installed as stand-alone units.

²⁾ The relays with an Order No. ending with "2" are designed for direct mounting and stand-alone installation. For 3TF68/3TF69 contactors, direct mounting is not possible.

³⁾ The relays with an Order No. ending with "1" are designed for stand-alone installation.

⁴⁾ Observe maximum rated operational current of the devices.

⁵⁾ Guide value for 4-pole standard motors at AC 50 Hz 400 V. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

⁶⁾ Maximum protection by fuse for overload relay, type of coordination 2. For fuse values in conjunction with contactors, see "Technical specifications" --> "Short-circuit protection with fuses for motor feeders", see note on Technical Information on page 5/1.

⁷⁾ The relays with an Order No. with "W" or "X" in penultimate position are equipped with a straight-through transformer.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

3RB20, 3RB21 for standard applications
3RB21 solid-state overload relays for direct mounting¹⁾²⁾ and stand-alone installation²⁾³⁾, CLASS 5, 10, 20 and 30 adjustable

Features and technical specifications:

- Overload protection, phase failure protection and unbalance protection
- Internal ground-fault detection (activatable)
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Electrical remote RESET integrated
- Switch position indicator
- TEST function and self-monitoring

 PU (UNIT, SET, M)= 1
 PS* = 1 unit
 PG = 101


3RB21 13-4RB0



3RB21 23-4QD0



3RB21 33-4UB0



3RB21 43-4ED0



3RB21 53-4FX2



3RB21 63-4MC2

Size of contactor ⁴⁾	Rating for induction motor Rated value ⁵⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination 2, gL/gG operational class ⁶⁾	DT	Screw terminals (on auxiliary current side)	Weight per PU approx.	DT	Spring-type terminals (on auxiliary current side)	Weight per PU approx.
	kW	A	A		Order No.	Price per PU		Order No.	Price per PU
Size S00¹⁾									
S00	0.04 ... 0.09	0.1 ... 0.4	1	▶	3RB21 13-4RB0	0.200 A		3RB21 13-4RD0	0.200
	0.12 ... 0.37	0.32 ... 1.25	2	▶	3RB21 13-4NB0	0.200 A		3RB21 13-4ND0	0.200
	0.55 ... 1.5	1 ... 4	10	▶	3RB21 13-4PB0	0.200 A		3RB21 13-4PD0	0.200
	1.1 ... 5.5	3 ... 12	20	▶	3RB21 13-4SB0	0.200 A		3RB21 13-4SD0	0.200
Size S0¹⁾									
S0	0.04 ... 0.09	0.1 ... 0.4	1	▶	3RB21 23-4RB0	0.220 ▶		3RB21 23-4RD0	0.220
	0.12 ... 0.37	0.32 ... 1.25	2	▶	3RB21 23-4NB0	0.220 ▶		3RB21 23-4ND0	0.220
	0.55 ... 1.5	1 ... 4	10	▶	3RB21 23-4PB0	0.220 ▶		3RB21 23-4PD0	0.220
	1.1 ... 5.5	3 ... 12	20	▶	3RB21 23-4SB0	0.220 A		3RB21 23-4SD0	0.220
	3 ... 11	6 ... 25	35	▶	3RB21 23-4QB0	0.220 A		3RB21 23-4QD0	0.220
Size S2¹⁾³⁾⁷⁾									
S2	3 ... 11	6 ... 25	63	▶	3RB21 33-4QB0	0.360 A		3RB21 33-4QD0	0.360
				▶	3RB21 33-4QW1	0.230 A		3RB21 33-4QX1	0.230
	7.5 ... 22	12.5 ... 50	80	▶	3RB21 33-4UB0	0.360 A		3RB21 33-4UD0	0.360
				▶	3RB21 33-4UW1	0.230 A		3RB21 33-4UX1	0.230
Size S3¹⁾³⁾⁷⁾									
S3	7.5 ... 22	12.5 ... 50	160	▶	3RB21 43-4UB0	0.560 A		3RB21 43-4UD0	0.560
	11 ... 45	25 ... 100	315	▶	3RB21 43-4EB0	0.560 A		3RB21 43-4ED0	0.560
				▶	3RB21 43-4EW1	0.450 A		3RB21 43-4EX1	0.450
Size S6²⁾⁷⁾									
S6 with busbar connections	22 ... 90	50 ... 200	315	▶	3RB21 53-4FC2	1.030 A		3RB21 53-4FF2	1.030
S6 with box terminals				▶	3RB21 53-4FW2	0.690 A		3RB21 53-4FX2	0.690
Size S10/S12²⁾									
S10/S12	22 ... 110	55 ... 250	400	▶	3RB21 63-4GC2	1.820 A		3RB21 63-4GF2	1.820
and size 14 (3TF68/ 3TF69)	90 ... 450	160 ... 630	800	▶	3RB21 63-4MC2	1.820 A		3RB21 63-4MF2	1.820

¹⁾ The relays with an Order No. ending with "0" are designed for direct mounting. With the matching terminal brackets (see "Accessories", page 5/60) the sizes S00 and S0 can also be installed as stand-alone units.

²⁾ The relays with an Order No. ending with "2" are designed for direct mounting and stand-alone installation. For 3TF68/3TF69 contactors, direct mounting is not possible.

³⁾ The relays with an Order No. ending with "1" are designed for stand-alone installation.

⁴⁾ Observe maximum rated operational current of the devices.

⁵⁾ Guide value for 4-pole standard motors at AC 50 Hz 400 V. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

⁶⁾ Maximum protection by fuse for overload relay, type of coordination 2. For fuse values in conjunction with contactors, see "Technical specifications" -> "Short-circuit protection with fuses for motor feeders", see note on Technical Information on page 5/1.


⁷⁾ The relays with an Order No. with "W" or "X" in penultimate position are equipped with a straight-through transformer.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays


3RB22, 3RB23 for high-feature applications

Overview

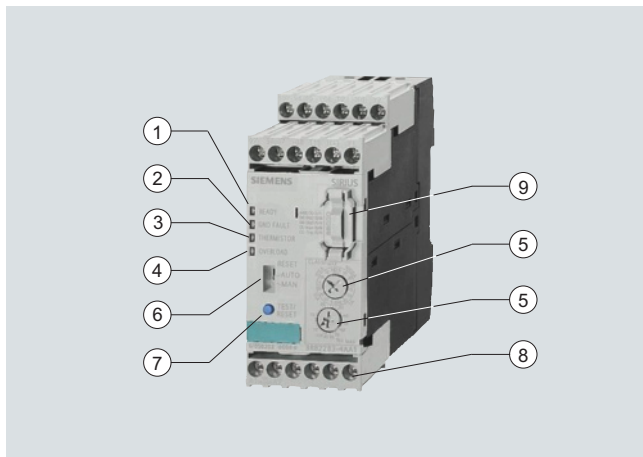

3RB22/3RB23 evaluation module

- ① Green LED "READY":
A continuous green light signals that the device is working correctly.
- ② Red LED "GND FAULT":
A continuous red light signals a ground-fault tripping.
- ③ Red LED "THERMISTOR":
A continuous red light signals an active thermistor trip.
- ④ Red LED "OVERLOAD":
A continuous red light signals an active overload trip; a flickering red light signals an imminent trip (overload warning).
- ⑤ Motor current and trip class setting:
Setting the device to the motor current and to the required trip class dependent on the start-up conditions is easy with the two rotary switches.
- ⑥ Selector switch for manual/automatic RESET:
With this switch you can choose between manual and automatic RESET.
- ⑦ Test/RESET button:
Enables testing of all important device components and functions, plus resetting of the device after a trip when manual RESET is selected.
- ⑧ Connecting terminals (removable joint block):
The generously sized terminals permit connection of two conductors with different cross-sections for the auxiliary, control and sensor circuits. Connection is possible with screw connection and alternatively with spring-type connection.
- ⑨ 3RB29 85 function expansion module:
Enables more functions to be added, e. g. internal ground-fault detection and/or an analog output with corresponding signals.

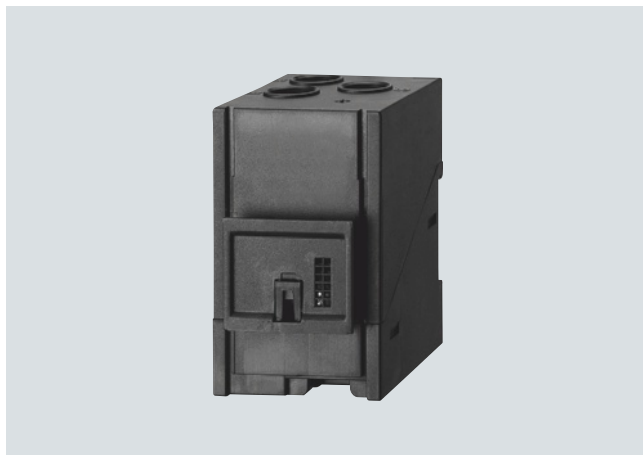

3RB29 06 current measuring module

The modular, solid-state overload relays with external power supply type 3RB22 (with monostable auxiliary contacts) and type 3RB23 (with bistable auxiliary contacts) up to 630 A (up to 820 A possible with a series transformer) have been designed for inverse-time delayed protection of loads with normal and heavy starting (for "Function" see note on [Technical Information on page 5/1](#)) against excessive temperature rises due to overload, phase unbalance or phase failure. An overload, phase unbalance or phase failure result in an increase of the motor current beyond the set rated motor current.

This current rise is detected by means of a current measuring module and electronically evaluated by a special evaluation module which is connected to it. The evaluation electronics sends a signal to the auxiliary contacts. The auxiliary contacts then switch off the load by means of a contactor. The break time depends on the ratio between the tripping current and set current I_e and is stored in the form of a long-term stable tripping characteristic (for "Characteristic Curves" see the note on [Technical Information on page 5/1](#)). The "tripped" status is signaled by means of a continuous red "OVERLOAD" LED.

The LED indicates imminent tripping of the relay due to overload, phase unbalance or phase failure by flickering when the limit current has been violated. This warning can also be issued as a signal through auxiliary contacts.

In addition to the described inverse-time delayed protection of loads against excessive temperature rises, the 3RB22/3RB23 solid-state overload relays also allow direct temperature monitoring of the motor windings (full motor protection) by connection with broken-wire interlock of a PTC sensor circuit. With this temperature-dependent protection, the loads can be protected against overheating caused indirectly by reduced coolant flow, for example, which cannot be detected by means of the current alone. In the event of overheating, the devices switch off the contactor, and thus the load, by means of the auxiliary contacts. The "tripped" status is signaled by means of a continuously illuminated "THERMISTOR" LED.

To also protect the loads against high-resistance short-circuits due to damage to the insulation, humidity, condensed water, etc., the 3RB22/3RB23 solid-state overload relays offer the possibility of internal ground-fault detection in conjunction with a function expansion module (for details see ["Selection and ordering data"](#)); not possible in conjunction with contactor assembly for wye-delta starting. In the event of a ground fault the 3RB22/3RB23 relays trip instantaneously. The "tripped" status is signaled by means of a continuous red "Ground Fault" LED. Signaling through auxiliary contacts is also possible.

After tripping due to overload, phase unbalance, phase failure, thermistor or ground-fault tripping, the relay is reset manually or automatically after the recovery time has elapsed (for "Function" see note on [Technical Information on page 5/1](#)). In conjunction with a function expansion module the motor current measured by the microprocessor can be output in the form of an analog signal 4 ... 20 mA DC for operating rotary coil instruments or for feeding into analog inputs of programmable logic controllers. With an additional AS-Interface analog module the current values can also be transferred over the AS-i bus system.

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials.

They comply with all important worldwide standards and approvals.

SIRIUS 3RB2 Solid-State Overload Relays

3RB22, 3RB23 for high-feature applications

"Increased safety" type of protection EEx e according to ATEX directive 94/9/EC

The 3RB22 (monostable) solid-state overload relays are suitable for the overload protection of explosion-proof motors with "increased safety" type of protection EEx e. The relays meet the requirements of EN 60079-7 (Electrical apparatus for areas subject to explosion hazards – Increased safety "e"); [see Chapter 20 "Appendix" --> "Standards and approvals" --> "Type overview of approved devices for explosion-protected areas \(ATEX Explosion Protection\)"](#).

EC type test certificate for Group II, Category (2) G/D exists. It has the number PTB 05 ATEX 3022.

Benefits

The most important features and benefits of the 3RB22/3RB23 solid-state overload relays are listed in the overview table ([see "General Data" on page 5/42](#)).

Application**Industries**

The 3RB22/3RB23 solid-state overload relays are suitable for customers from all industries who want to guarantee optimum inverse-time delayed and temperature-dependent protection of their electrical loads (e. g. motors) under normal and heavy starting conditions (CLASS 5 to CLASS 30), minimize project completion times, inventories and power consumption, and optimize plant availability and maintenance management.

Application

The 3RB22/3RB23 solid-state overload relays have been designed for the protection of three-phase asynchronous and single-phase AC motors.

If single-phase AC motors are to be protected by the 3RB22/3RB23 solid-state overload relays, the main current paths of the current measuring modules must be series-connected ([for "Schematics" see note on Technical Information on page 5/1](#)).

Ambient conditions

The devices are insensitive to external influences such as shocks, corrosive environments, ageing and temperature fluctuation.

For the temperature range from –25 °C to +60 °C, the 3RB22/3RB23 solid-state overload relays compensate the temperature according to IEC 60947-4-1.

Configuration notes for use of the devices below –25 °C or above +60 °C on request.

Accessories

The following optional accessories are available for the 3RB22/3RB23 solid-state overload relays:

- A sealable cover for the evaluation module
- Terminal covers for the current measuring modules size S6 and S10/S12
- Box terminal blocks for the current measuring modules size S6 and S10/S12
- Push-in lugs for screw fixing the 3RB22/3RB23 overload relays and the 3RB29 06 current measuring modules.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

3RB22, 3RB23 for high-feature applications

Selection and ordering data

3RB22/3RB23 solid-state overload relays for full motor protection with screw terminals or spring-type terminals for stand-alone installation, CLASS 5, 10, 20 and 30 adjustable

Features and technical specifications:

- Overload protection, phase failure protection and unbalance protection
- External power supply 24 ... 240 V
- Auxiliary contacts 2 NO + 2 NC
- Manual and automatic RESET
- Electrical remote RESET integrated
- 4 LEDs for operating and status displays
- TEST function and self-monitoring
- Internal ground-fault detection with function expansion module
- Screw terminals or spring-type terminals for auxiliary, control and sensor circuits
- Input for PTC sensor circuit
- Analog output with function expansion module

Size of contactor	Version	DT	Screw terminals	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
			Order No.	Price per PU			kg

Evaluation modules



3RB2. 83-4AA1

S00 ... S12	Monostable	▶	3RB22 83-4AA1	1	1 unit	101	0.300
	Bistable	▶	3RB23 83-4AA1	1	1 unit	101	0.300

Size of contactor	Version	DT	Spring-type terminals	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
			Order No.	Price per PU			kg

Evaluation modules




3RB2. 83-4AC1

S00 ... S12	Monostable	A	3RB22 83-4AC1	1	1 unit	101	0.300
	Bistable	A	3RB23 83-4AC1	1	1 unit	101	0.300

Size of contactor	Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
								kg

Function expansion modules



S00 ... S12	For plugging into evaluation module (1 unit)						
	Analog Basic 1 modules¹⁾	▶	3RB29 85-2AA0	1	1 unit	101	0.030
	Analog output DC 4 ... 20 mA, with overload warning						
	Analog Basic 1 modules¹⁾²⁾	▶	3RB29 85-2AA1	1	1 unit	101	0.030
	Analog output DC 4 ... 20 mA, with internal ground-fault detection and overload warning						
	Analog Basic 2 modules¹⁾²⁾	▶	3RB29 85-2AB1	1	1 unit	101	0.030
Analog output DC 4 ... 20 mA, with internal ground-fault detection and ground-fault signaling							
	Basic 1 GF modules²⁾	▶	3RB29 85-2CA1	1	1 unit	101	0.030
with internal ground-fault detection and overload warning							
	Basic 2 GF modules²⁾	▶	3RB29 85-2CB1	1	1 unit	101	0.030
with internal ground-fault detection and ground-fault signaling							

Note:

Analog input modules, e. g. SM 331, must be configured for 4-wire measuring transducers. In this case the analog input module must not supply current to the analog output of the 3RB22/ 3RB23 relay.

¹⁾ The analog signal DC 4 ... 20 mA can be used for operating rotary coil instruments or for feeding into analog inputs of programmable logic controllers.

²⁾ The following information on ground-fault protection refers to sinusoidal residual currents at 50/60 Hz:





- With a motor current of between 0.3 and 2 times the set current I_n the unit will trip at a ground-fault current equal to 30 % of the set current.
- With a motor current of between 2 and 8 times the set current I_n the unit will trip at a ground-fault current equal to 15 % of the set current.
- The response delay amounts to between 0.5 and 1 second.

* You can order this quantity or a multiple thereof.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

3RB22, 3RB23 for high-feature applications
Current measuring modules for direct mounting¹⁾ and stand-alone installation¹⁾²⁾

	Size of contactor ³⁾	Rating for induction motor rated value ⁴⁾	Current setting of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination 2, gL/gG operational class ⁵⁾	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
		kW	A								kg
Size S00/S0 ²⁾⁶⁾											
	S00/S0	0.09 ... 1.1	0.3 ... 3	20	▶	3RB29 06-2BG1		1	1 unit	101	0.100
		1.1 ... 11	2.4 ... 25	63	▶	3RB29 06-2DG1		1	1 unit	101	0.150
Size S2/S3 ²⁾⁶⁾											
	S2/S3	5.5 ... 45	10 ... 100	315	▶	3RB29 06-2JG1		1	1 unit	101	0.350
Size S6 ¹⁾⁶⁾											
	S6 with busbar connection	11 ... 90	20 ... 200	315	▶	3RB29 56-2TH2		1	1 unit	101	1.000
	S6 with box terminals				▶	3RB29 56-2TG2		1	1 unit	101	0.600
Size S10/S12 ¹⁾											
	S10/S12 and size 14 (3TF68/3TF69)	37 ... 450	63 ... 630	800	▶	3RB29 66-2WH2		1	1 unit	101	1.750

Note:

The connecting cable between the current measuring module and the evaluation module is not included in the scope of supply; please order separately.

¹⁾ The current measuring modules with an Order No. ending with "2" are designed for direct mounting and stand-alone installation. For 3TF68/3TF69 contactors, direct mounting is not possible.

²⁾ The current measuring modules with an Order No. ending with "1" are designed for stand-alone installation.


³⁾ Observe maximum rated operational current of the devices.

⁴⁾ Guide value for 4-pole standard motors at AC 50 Hz 400 V. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

⁵⁾ Maximum protection by fuse for overload relay, type of coordination 2. For fuse values in conjunction with contactors, see "Technical specifications" --> "Short-circuit protection with fuses for motor feeders", see note on Technical Information on page 5/1.

⁶⁾ The modules with an Order No. with "G" in penultimate position are equipped with a straight-through transformer.

Accessories

Size of contactor	Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
								kg
Connecting cables (essential accessory)								
	S00 ... S3	For connection between evaluation module and current measuring module	▶	3RB29 87-2B	1	1 unit	101	0.010
	S00 ... S12	• Length 0.1 m (only for mounting of the evaluation module directly onto the current measuring module)	▶					
	S00 ... S12	• Length 0.5 m	▶	3RB29 87-2D	1	1 unit	101	0.020

3RB29 87-2.

For more accessories, see page 5/60.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

Accessories

Overview

Overload relays for standard applications

The following optional accessories are available for the 3RB20/3RB21 solid-state overload relays:




- One terminal bracket each for the overload relays size S00 and S0 (sizes S2 to S12 can be installed as stand-alone installation without a terminal bracket)
- One mechanical remote RESET module for all sizes
- One cable release for resetting devices which are difficult to access (for all sizes)
- One sealable cover for all sizes
- Terminal covers for sizes S2 to S10/S12
- Box terminal blocks for sizes S6 and S10/S12

Overload relays for high-feature applications

The following optional accessories are available for the 3RB22/3RB23 solid-state overload relays:

- A sealable cover for the evaluation module
- Terminal covers for the current measuring modules size S6 and S10/S12
- Box terminal blocks for the current measuring modules size S6 and S10/S12
- Push-in lugs for screw fixing the 3RB22/3RB23 overload relays and the 3RB29 06 current measuring modules.

Selection and ordering data

Version	Size	DT	Order No.	Price €	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Terminal brackets for stand-alone installation¹⁾								
	For separate mounting of the overload relays; screw and snap-on mounting onto TH 35 standard mounting rail	S00	▶ 3RB29 13-0AA1		1	1 unit	101	0.060
		S0	▶ 3RB29 23-0AA1		1	1 unit	101	0.080
Mechanical RESET²⁾								
	Resetting plungers, holders and formers	S00 ... S10/S12	▶ 3RU19 00-1A		1	1 unit	101	0.038
	Pushbuttons with extended stroke (12 mm), IP65, Ø 22 mm	B	3SB30 00-0EA11		1	1 unit	102	0.020
	Extension plungers For compensation of the distance between a pushbutton and the unlatching button of the relay	A	3SX1 335		1	1 unit	102	0.004
Cable releases with holder for RESET²⁾								
	For Ø 6.5 mm holes in the control panel; max. control panel thickness 8 mm	S00 ... S10/S12						
	• Length 400 mm	▶	3RU19 00-1B		1	1 unit	101	0.063
	• Length 600 mm	▶	3RU19 00-1C		1	1 unit	101	0.073

3RB29 ..3-0AA1

3RU19 00-1A
with pushbutton and
extension plunger

3RU19 00-1.

¹⁾ Only for 3RB20/3RB21.







²⁾ Only for 3RB20/3RB21. The accessories are identical to those of the 3RU11 thermal overload relays.

* You can order this quantity or a multiple thereof.

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

Accessories

Version	Size	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Sealable covers								
	For covering the setting knobs							
	• For 3RB20/3RB21 for standard applications	S00 ... S10/S12	▶	3RB29 84-0	1	10 units	101	0.020
	• For 3RB22/3RB23 for high-feature applications	--	▶	3RB29 84-2	1	10 units	101	0.050
Terminal covers								
	Covers for cable lugs and busbar connections							
	• Length 55 mm ¹⁾	S3	▶	3RT19 46-4EA1	1	1 unit	101	0.040
	• Length 100 mm	S6	▶	3RT19 56-4EA1	1	1 unit	101	0.070
3RT19 46-4EA1	• Length 120 mm	S10/S12	▶	3RT19 66-4EA1	1	1 unit	101	0.130
	Covers for box terminals							
	• Length 20.6 mm ¹⁾	S2	▶	3RT19 36-4EA2	1	1 unit	101	0.020
	• Length 20.8 mm ¹⁾	S3	▶	3RT19 46-4EA2	1	1 unit	101	0.025
	• Length 25 mm	S6	▶	3RT19 56-4EA2	1	1 unit	101	0.030
	• Length 30 mm	S10/S12	▶	3RT19 66-4EA2	1	1 unit	101	0.040
3RT19 36-4EA2	Covers for screw terminals	S6	▶	3RT19 56-4EA3	1	1 unit	101	0.020
The figures show mounting on the contactor	between contactor and overload relay, without box terminals (1 unit required per combination)	S10/S12	▶	3RT19 66-4EA3	1	1 unit	101	0.060
Box terminal blocks								
	For round and ribbon cables							
	• Up to 70 mm ²	S6 ²⁾	▶	3RT19 55-4G	1	1 unit	101	0.230
	• Up to 120 mm ²	S6	▶	3RT19 56-4G	1	1 unit	101	0.260
	• Up to 240 mm ²	S10/S12	▶	3RT19 66-4G	1	1 unit	101	0.676
3RT19 5.-4G	For technical specifications for conductor cross-sections see note on Technical Information on page 5/1.							
Push-in lugs								
	For screw fixing of 3RB22/3RB23 overload relays	--	▶	3RP19 03	1	10 units	101	0.002
	For screw fixing the 3RB29 06 current measuring modules (2 units are required per module)	S00 ... S3 A		3RB19 00-0B	100	10 units	101	0.100
3RP19 03								
3RB19 00-0B								
Tools for opening spring-type terminals by hand								
	Screwdrivers, 2.5 mm x 0.4 mm, length approx. 160 mm; green, suitable for a max. conductor cross-section of 1.5 mm ²	Can be used for: Auxiliary circuit connections	C	8WH9 200-0AA00	1	10 units	044	0.032



¹⁾ Only for 3RB20/3RB21. The accessories are identical to those of the 3RU11 thermal overload relays.

²⁾ In the scope of supply for 3RT10 54-1 contactors (55 kW).

Overload Relays

SIRIUS 3RB2 Solid-State Overload Relays

Accessories

	Version	Size/ Color	Use	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Tools for opening Cage Clamp terminals										
 8WA2 803	Screwdrivers									
	3.5 mm x 0.5 mm, length approx. 175 mm; suitable for a max. conductor cross- section of 2.5 mm ²	Green, partially insulated Green	Main and auxiliary cir- cuit connec- tions	C	8WA2 880		1	1 unit	041	0.034
				C	8WA2 803		1	1 unit	041	0.024
Blank labels										
 3RT19 00-1SB10	Unit labeling plates for SIRIUS devices	20 mm x 7 mm, pastel turquoise		C	3RT19 00-1SB20		100	340 units	101	0.200
	Inscription labels for sticking For SIRIUS devices	19 mm x 6 mm, pastel turquoise 19 mm x 6 mm, zinc yellow	3RB2, 3RU11	D	3RT19 00-1SB60		100	3060 units	101	15.000
				C	3RT19 00-1SD60		100	3060 units	101	12.000
Computer labeling systems										
For individual inscription of unit labeling plates										
Obtainable from:										
murrplastik Systemtechnik GmbH										
www.murrplastik.de										