



NA10

FEEDER PROTECTION RELAY


THE BASIC SOLUTION FOR FEEDERS AND TRANSFORMERS PROTECTION

— Application

The relay type NA10 can be used in radial networks as feeder or power transformer protection.

In solidly grounded systems the residual overcurrent protection can be used on feeders of any length, while in ungrounded or Petersen coil and/or resistance grounded systems, the residual overcurrent protection can be used on feeders of small length in order to avoid unwanted trippings due to the capacitive current contribution of the feeder on external ground fault.

The relay complies with CEI 0-16 requirements.

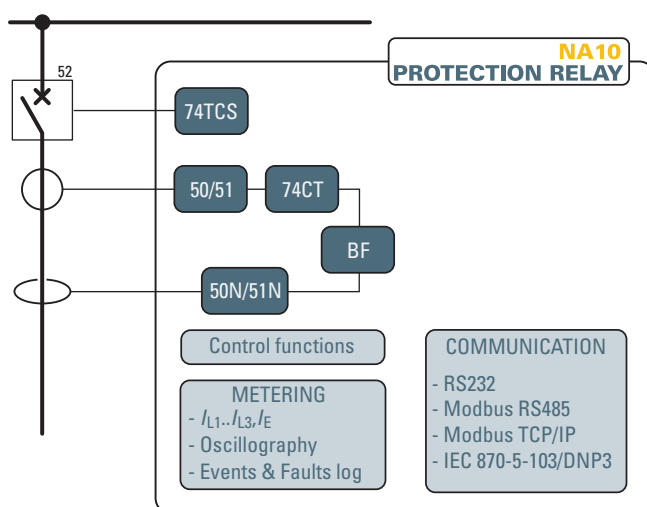

- Protective & control functions

50/51	Phase overcurrent
50N/51N	Residual overcurrent
BF	Breaker failure
74CT	CT supervision
74TCS	Trip circuit supervision

— Measuring inputs

Three phase current inputs and one residual current input, with nominal currents independently selectable at 1 A or 5 A through DIP-switches.

— Binary inputs

Two or five binary inputs are available with programmable active state (active-ON/active-OFF) and programmable timer (active to OFF/ON or ON/OFF transitions). Several presettable functions can be associated to each input.

— Construction

According to the hardware configurations, the NA10 protection relay can be shipped in various case styles depending on the required mounting options (flush, projecting mounting, rack or with separate operator panel).

— Output relays

Six output relays are available (two changeover, three make and one break contacts); each relay may be individually programmed as normal state (normally energized, de-energized or pulse) and reset mode (manual or automatic).

A programmable timer is provided for each relay (minimum pulse width). The user may program the function of each relay in accordance with a matrix (tripping matrix) structure.

— Modular design

In order to extend I/O capability, the hardware can be customized through external auxiliary modules:

- MRI - Output relays and LEDs
- MID16 - Binary inputs
- MCI - 4...20 mA converter
- MPT - Pt100 probe inputs.



— Blocking input/outputs

One output blocking circuit and one input blocking circuit are provided.

The output blocking circuits of one or several Pro_N relays, shunted together, must be connected to the input blocking circuit of the protection relay, which is installed upwards in the electric plant. The output circuit works as a simple contact, whose condition is detected by the input circuit of the upwards protection relay.

For long distances, when high insulation and high EMC immunity is essential, a suitable pilot wire to fiber optic converter (BFO) is available.

— Firmware updating

The use of flash memory units allows on-site firmware updating.


— Two set point profiles (A,B)

Two independent groups of settings are provided. Switching from profiles may be operated by means of MMI, binary input and communication.

— MMI (Man Machine Interface)

The user interface comprises a membrane keyboard, a backlight LCD alphanumeric display and eight LEDs.

The green ON LED indicates auxiliary power supply and self diagnostics, two LEDs are dedicated to the Start and Trip (yellow for Start, red for Trip) and five red LEDs are user assignable.

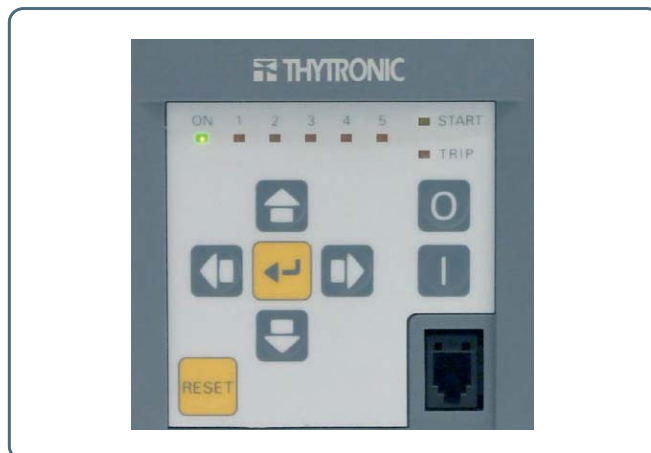

— Communication

Multiple communication interfaces are implemented:

- One RS232 local communication front-end interface for communication with ThySetter setup software
- Two back-end interfaces for communication with remote monitoring and control systems by:
 - RS485 port - ModBus® RTU, IEC 60870-5-103 or DNP3 protocol,
 - Ethernet port (RJ45 or optical fiber) - ModBus/TCP protocol.

— Programming and settings


All relay programming and adjustment operations may be performed through MMI (Keyboard and display) or using a Personal Computer with the aid of the ThySetter software.

The same PC setup software is required to set, monitor and configure all Pro_N devices.

Full access to the available data is provided:

- Read status and measures.
- Read/edit settings (on-line or off-line edit).

Two session level (User or Administrator) with password for sensible data access are provided.

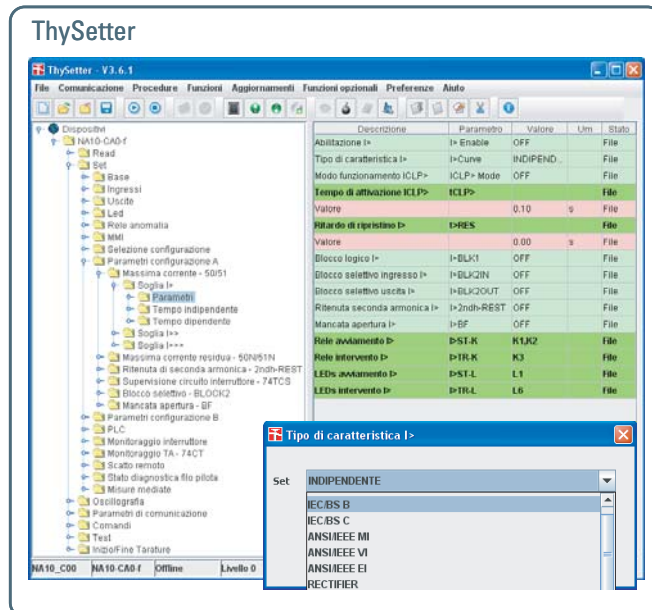

— Control and monitoring

Several predefined functions are implemented:

- Circuit Breaker commands and diagnostic.
- Activation of two set point profiles.
- Phase CTs monitoring (74CT).
- Logic selectivity.
- Cold load pickup (CLP) with block or setting change.
- Trip circuit supervision (74TCS).
- Second harmonic restraint (inrush).
- Remote tripping.

User defined logic may be customized according to IEC 61131-3 standard protocol (PLC).

Circuit Breaker commands and diagnostic

Several diagnostic, monitoring and control functions are provided:

- Health thresholds can be set; when the accumulated duty (ΣI or ΣI^2t), the number of operations or the opening time exceeds the threshold an alarm is activated.
- Breaker failure (BF); breaker status is monitored by means 52a-52b and/or through line current measurements.
- Trip Circuit Supervision (74TCS).
- Breaker control; opening and closing commands can be carried out locally or remotely.

Cold Load Pickup (CLP)

The Cold Load Pickup feature can operate in two following modes:

- Each protective element can be blocked for a adjustable time.
- Each threshold can be increased for a programmable time.

It is triggered by the circuit breaker closing.

Second harmonic restraint

To prevent unwanted tripping of the protective functions on transformer inrush current, the protective elements can be blocked when the ratio between the second harmonic current and the relative fundamental current is larger than a user programmable threshold.

The function can be programmed to switch an output relay so as to cause a blocking protection relays lacking in second harmonic restraint.

Logic selectivity

With the aim of providing a fast selective protection system some protective functions may be blocked (pilot wire accelerated logic). To guarantee maximum fail-safety, the relay performs a run time monitoring for pilot wire continuity and pilot wire shorting. Exactly the output blocking circuit periodically produces a pulse, having a small enough width in order to be ignored as an effective blocking signal by the input blocking circuit of the upwards protection, but suitable to prove the continuity of the pilot wire. Furthermore a permanent activation (or better, with a duration longer than a preset time) of the blocking signal is identified, as a warning for a possible short circuit in the pilot wire or in the output circuit of the downstream protection.

The logic selectivity function can be realized through any combination of binary inputs, output relays and/or committed pilot wires circuits.

— Self diagnostics

All hardware and software functions are repeatedly checked and any anomalies reported via display messages, communication interfaces, LEDs and output relays.

Anomalies may refer to:

- Hw faults (auxiliary power supply, output relay coil interruptions, MMI board...)
- Sw faults (boot and run time tests for data base, EEPROM memory checksum failure, data BUS,...)
- Pilot wire faults (break or short in the wire).
- Circuit breaker faults.

— Metering

Metering values for phase and residual currents are available for reading on a display or to communication interfaces.

Input signals are sampled 24 times per period and the RMS value of the fundamental component is measured using the DFT (Discrete Fourier Transform) algorithm and digital filtering.

With DFT the RMS value of 2nd, 3rd, 4th and 5th harmonic of phase current are also measured.

On the base of the direct measurements, the minimum-peak-fixed-rolling demand, mean-minimum-maximum absolute phase currents are processed.

The measured signals can be displayed with reference to nominal values or directly expressed in amperes.

— Event storage

Several useful data are stored for diagnostic purpose; the events are stored into a non volatile memory.

They are graded from the newest to the older after the "Events reading" command (ThySetter) is issued:

- Sequence of Event Recorder (SER)

The event recorder runs continuously capturing in circular mode the last three hundred events upon trigger of binary input/output.

- Sequence of Fault Recorder (SFR)

The fault recorder runs continuously capturing in circular mode the last twenty faults upon trigger of binary input/output and/or element pickup (start-trip).

- Settings recording

Following some setting changes the last eight changes are recorded in circular mode (Data Logger CEI 0-16)

- Trip counters


— Digital Fault Recorder (Oscillography)

Upon trigger of tripping/starting of each function or external signals, the relay records in COMTRADE format:

- Oscillography with instantaneous values for transient analysis.
- RMS values for long time periods analysis.
- Logic states (binary inputs and output relays).

Note - A license for Digital Fault Recorder function is required, for purchase procedure please contact Thytronic.

The records are stored in nonvolatile memory

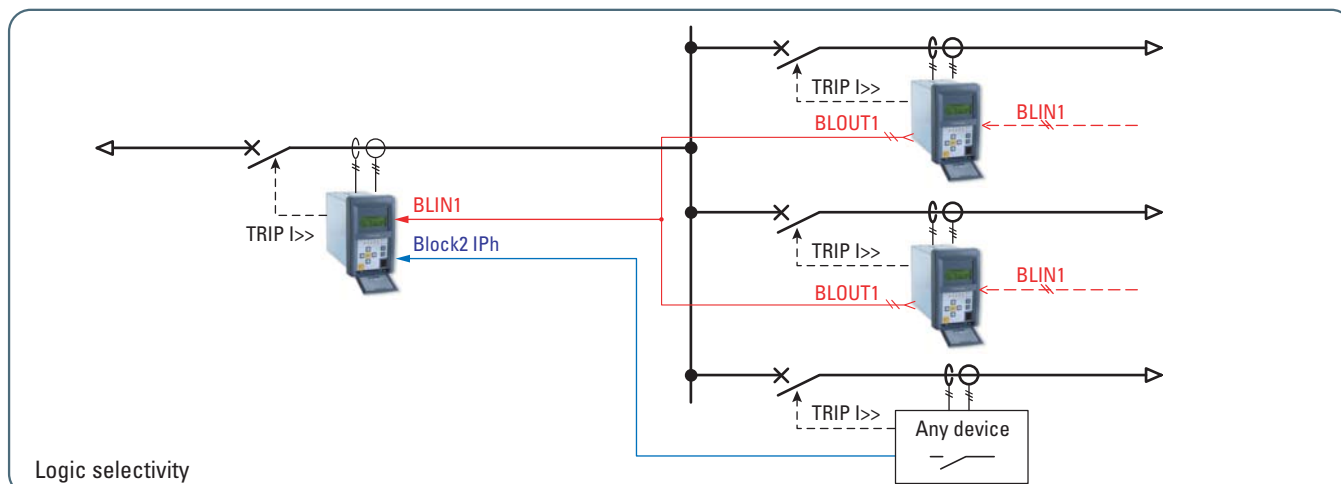

SPECIFICATIONS

GENERAL

- **Mechanical data**
Mounting: flush, projecting, rack or separated operator panel
Mass (flush mounting case) 2.0 kg
- **Insulation tests**
Reference standards EN 60255-5
High voltage test 50Hz 2 kV 60 s
Impulse voltage withstand (1.2/50 μ s) 5 kV
Insulation resistance >100 M Ω
- **Voltage dip and interruption**
Reference standards EN 61000-4-29
- **EMC tests for interference immunity**
1 MHz damped oscillatory wave EN 60255-22-1 1 kV-2.5 kV
Electrostatic discharge EN 60255-22-2 8 kV
Fast transient burst (5/50 ns) EN 60255-22-4 4 kV
Conducted radio-frequency fields EN 60255-22-6 10 V
Radiated radio-frequency fields EN 60255-4-3 10 V/m
High energy pulse EN 61000-4-5 2 kV
Magnetic field 50 Hz EN 61000-4-8 1 kA/m
Damped oscillatory wave EN 61000-4-12 2.5 kV
Ring wave EN 61000-4-12 2 kV
Conducted common mode (0...150 kHz) EN 61000-4-16 10 V
- **Emission**
Reference standards EN 61000-6-4 (ex EN 50081-2)
Conducted emission 0.15...30 MHz Class A
Radiated emission 30...1000 MHz Class A
- **Climatic tests**
Reference standards IEC 60068-x, ENEL R CLI 01, CEI 50
- **Mechanical tests**
Reference standards EN 60255-21-1, 21-2, 21-3
- **Safety requirements**
Reference standards EN 61010-1
Pollution degree 3
Reference voltage 250 V
Overvoltage III
Pulse voltage 5 kV
Reference standards EN 60529
Protection degree:
• Front side IP52
• Rear side, connection terminals IP20
- **Environmental conditions**
Ambient temperature -25...+70 °C
Storage temperature -40...+85 °C
Relative humidity 10...95 %
Atmospheric pressure 70...110 kPa
- **Certifications**
Product standard for measuring relays EN 50263
CE conformity
• EMC Directive 89/336/EEC
• Low Voltage Directive 73/23/EEC
Type tests IEC 60255-6

COMMUNICATION INTERFACES

- Local PC RS232 19200 bps
- Network:
• RS485 1200...57600 bps
• Ethernet 100BaseT 100 Mbps
Protocol ModBus® RTU/IEC 60870-5-103/DNP3, TCP/IP

INPUT CIRCUITS

- **Auxiliary power supply Uaux**
Nominal value (range) 24...48 Vac/dc, 115...230 Vac/110...220 Vdc
Operative range (each one of the above nominal values) 19...60 Vac/dc
85...265 Vac/75...300 Vdc

Power consumption:
• Maximum (energized relays, Ethernet TX) 10 W (20 VA)
• Maximum (energized relays, Ethernet FX) 15 W (25 VA)
- **Phase current inputs**
Nominal current I_n 1 A or 5 A selectable by DIP Switches
Permanent overload 25 A
Thermal overload (1s) 500 A
Rated consumption (for any phase) ≤ 0.002 VA ($I_n = 1$ A)
 ≤ 0.04 VA ($I_n = 5$ A)
- **Residual current input**
Nominal current I_{En} 1 A or 5 A selectable by DIP Switch
Permanent overload 25 A
Thermal overload (1s) 500 A
Rated consumption ≤ 0.006 VA ($I_{En} = 1$ A), ≤ 0.012 VA ($I_{En} = 5$ A)
- **Binary inputs**
Quantity 2 or 5
Type dry inputs
Max permissible voltage 19...265 Vac/19...300 Vdc
Max consumption, energized 3 mA
- **Block input (Logic selectivity)**
Quantity 1
Type polarized wet input (powered by internal isolated supply)
Max consumption, energized 5 mA

OUTPUT CIRCUITS

- **Output relays K1...K6**
Quantity 6
• Type of contacts K1, K2 changeover (SPDT, type C)
• Type of contacts K3, K4, K5 make (SPST-NO, type A)
• Type of contacts K6 break (SPST-NC, type B)
Nominal current 8 A
Nominal voltage/max switching voltage 250 Vac/400 Vac
Breaking capacity:
• Direct current (L/R = 40 ms) 50 W
• Alternating current ($\lambda = 0.4$) 1250 VA
Make 1000 W/VA
Short duration current (0,5 s) 30 A
- **Block output (Logic selectivity)**
Quantity 1
Type optocoupler
- **LEDs**
Quantity 8
• ON/fail (green) 1
• Start (yellow) 1
• Trip (red) 1
• Allocatable (red) 5

GENERAL SETTINGS

- **Rated values**
Relay nominal frequency (f_n) 50, 60 Hz
Relay phase nominal current (I_n) 1 A, 5 A
Phase CT nominal primary current (I_{np}) 1 A...10 kA
Relay residual nominal current (I_{En}) 1 A, 5 A
Residual CT nominal primary current (I_{Enp}) 1 A...10 kA
- **Binary input timers**
ON delay time (IN1 t_{ON} , IN2 t_{ON} ,...IN5 t_{ON}) 0.00...100.0 s
OFF delay time (IN1 t_{OFF} , IN2 t_{OFF} ,...IN5 t_{OFF}) 0.00...100.0 s
Logic Active-ON/Active-OFF

— Relay output timers

Minimum pulse width (t_{TR}) 0.000...0.500 s

PROTECTIVE FUNCTIONS

— Thermal protection with RTD thermometric probes - 26

Alarm

- Alarm threshold θ_{ALx} ($x=1...8$) 0...200 °C
- Operating time $t_{\theta ALx}$ ($x=1...8$) 0...100 s

Trip

- Trip threshold $\theta_{>x}$ ($x=1...8$) 0...200 °C
- Operating time $t_{\theta >x}$ ($x=1...8$) 0...100 s

Note: The element becomes available when the MPT module is enabled and connected to Thybus

— Phase overcurrent - 50/51

I> Element

- I> Curve type (I>Curve) DEFINITE
IEC/BS A, B, C, ANSI/IEEE MI, VI, EI
RECTIFIER, I²t or EM
- I_{CLP}> Activation time ($t_{CLP>}$) 0.00...100.0 s
- I> Reset time delay ($t_{>RES}$) 0.00...100.0 s

Definite time

- 50/51 First threshold definite time (I>def) 0.100...40.0 I_n
- I>def within CLP (I_{CLP}>def) 0.100...40.0 I_n
- I>def Operating time ($t_{>def}$) 0.04...200 s

Inverse time

- 50/51 First threshold inverse time (I>inv) 0.100...20.00 I_n
- I>inv within CLP (I_{CLP}>inv) 0.100...20.00 I_n
- I>inv Operating time ($t_{>inv}$) 0.02...60.0 s

I>> Element

- Type characteristic DEFINITE or I²t
- I_{CLP}>> Activation time ($t_{CLP>>}$) 0.00...100.0 s
- I>> Reset time delay ($t_{>>RES}$) 0.00...100.0 s

Definite time

- 50/51 Second threshold definite time (I>>def) 0.100...40.0 I_n
- I>>def within CLP (I_{CLP}>>def) 0.100...40.0 I_n
- I>>def Operating time ($t_{>>def}$) 0.03...10.00 s

Inverse time

- 50/51 Second threshold inverse time (I>>inv) 0.100...20.00 I_n
- I>>inv within CLP (I_{CLP}>>inv) 0.100...20.00 I_n
- I>>inv Operating time ($t_{>>inv}$) 0.02...10.00 s

I>>> Element

- I_{CLP}>>> Activation time ($t_{CLP>>>}$) 0.00...100.0 s
- I>>> Reset time delay ($t_{>>>RES}$) 0.00...100.0 s

Definite time

- 50/51 Third threshold definite time (I>>>def) 0.100...40.0 I_n
- I>>>def within CLP (I_{CLP}>>>def) 0.100...40.0 I_n
- I>>>def Operating time ($t_{>>>def}$) 0.03...10.00 s

— Residual overcurrent - 50N/51N

I_E> Element

- I_E> Curve type (I_E>Curve) DEFINITE
IEC/BS A, B, C, NSI/IEEE MI, VI, EI, EM
- I_{ECLP}> Activation time ($t_{ECLP>}$) 0.00...100.0 s
- I_E> Reset time delay ($t_{E>RES}$) 0.00...100.0 s

Definite time

- 50N/51N First threshold definite time (I_E>def) 0.002...10.00 I_{En}
- I_E>def within CLP (I_{ECLP}>def) 0.002...10.00 I_{En}
- I_E>def Operating time ($t_{E>def}$) 0.04...200 s

Inverse time

- 50N/51N First threshold inverse time (I_E>inv) 0.002...2.00 I_{En}
- I_E>inv within CLP (I_{ECLP}>inv) 0.002...2.00 I_{En}
- I_E>inv Operating time ($t_{E>inv}$) 0.02...60.0 s

I_E>> Element

- I_{ECLP}>> Activation time ($t_{ECLP>>}$) 0.00...100.0 s
- I_E>> Reset time delay ($t_{E>>RES}$) 0.00...100.0 s

Definite time

- 50N/51N Second threshold definite time (I_E>>def) 0.002...10.00 I_{En}
- I_E>>def within CLP (I_{ECLP}>>def) 0.02...10.00 I_{En}
- I_E>>def Operating time ($t_{E>>def}$) 0.03...10.00 s

I_E>>> Element

- I_{ECLP}>>> Activation time ($t_{ECLP>>>}$) 0.00...100.0 s
- I_{ECLP}>>> Reset time delay ($t_{E>>>RES}$) 0.00...100.0 s

Definite time

- 50N/51N Third threshold definite time (I_E>>>def) 0.002...10.00 I_{En}
- I_E>>>def within CLP (I_{ECLP}>>>def) 0.002...10.00 I_{En}
- I_E>>>def Operating time ($t_{E>>>def}$) 0.03...10.00 s

— Breaker failure - BF

- BF Phase current threshold (I_{BF>}) 0.05...1.00 I_n
- BF Residual current threshold (I_{EBF>}) 0.01...2.00 I_{En}
- BF Time delay (t_{BF}) 0.06...10.00 s

— Selective block - BLOCK2

Selective block IN:

- BLIN Max activation time for phase protections (t_{B-IPh}) 0.10...10.00 s
- BLIN Max activation time for earth protections (t_{B-IE}) 0.10...10.00 s

Selective block OUT:

- BLOUT Dropout time delay for phase protections (t_{F-IPh}) 0.00...1.00 s
- BLOUT Drop-out time delay for phase protections (t_{F-IE}) 0.00...1.00 s
- BLOUT Drop-out time delay for phase and earth protections (t_{F-IPh/IE}) 0.00...1.00 s

— Second Harmonic Restraint - 2ndh-REST

- Second harmonic restraint threshold (I_{2ndh>}) 10...50 %
- I_{2ndh>} Reset time delay (t_{2ndh>RES}) 0.00...100.0 s

— Circuit Breaker supervision

- Number of CB trips (N.Open) 0...10000
- Cumulative CB tripping currents (SumI) 0...5000 I_n
- CB opening time for I²t calculation (t_{break}) 0.05...1.00 s
- Cumulative CB tripping I²t (SumI²t) 0...5000 (I_n)²·s
- CB max allowed opening time (t_{break>}) 0.05...1.00 s

— CT supervision - 74CT

- 74CT Threshold (S<) 0.10...0.95
- 74CT Overcurrent threshold (I*) 0.10...1.00 I_n
- S< Operate time (t_{S<}) 0.03...200 s

— Pilot wire diagnostic

- BLOUT1 Diagnostic pulses period (PulseBLOUT1) OFF - 0.1-1-5-10-60-120 s
- BLIN1 Diagnostic pulses control time interval (PulseBLIN1) OFF - 0.1-1-5-10-60-120 s

METERING & RECORDING

— Measured parameters

Direct:

- Frequency f
- Fundamental RMS phase currents I_{L1}, I_{L2}, I_{L3}
- Fundamental RMS residual current I_E

Calculated:

- Maximum current between I_{L1}-I_{L2}-I_{L3} I_{Lmax}
- Minimum current between I_{L1}-I_{L2}-I_{L3} I_{Lmin}
- Average current between I_{L1}-I_{L2}-I_{L3} I_L

2nd harmonic:

- Second harmonic phase currents I_{L1-2nd}, I_{L2-2nd}, I_{L3-2nd}
- Maximum of the second harmonic phase currents/fundamental component percentage ratio I_{-2nd}/I_L

3rd harmonic:

- Third harmonic phase currents I_{L1-3rd}, I_{L2-3rd}, I_{L3-3rd}
- Third harmonic residual current I_{E-3rd}

4th harmonic:

- Fourth harmonic phase currents I_{L1-4th}, I_{L2-4th}, I_{L3-4th}

5th harmonic:

- Fifth harmonic phase currents I_{L1-5th}, I_{L2-5th}, I_{L3-5th}

On demand:

- Phase fixed currents demand I_{L1FIX}, I_{L2FIX}, I_{L3FIX}
- Phase rolling currents demand I_{L1ROL}, I_{L2ROL}, I_{L3ROL}
- Phase peak currents demand I_{L1MAX}, I_{L2MAX}, I_{L3MAX}
- Phase minimum currents demand I_{L1MIN}, I_{L2MIN}, I_{L3MIN}

Event recording (SER)

Number of events	300
Recording mode	circular
Trigger:	
• Output relays switching	K1...K6...Kx
• Binary inputs switching	IN1, IN2...INx
• Setting changes	
Data recorded:	
• Event counter (resettable by ThySetter)	0...10 ⁹
• Event cause	binary input/output relay/setting changes
• Time stamp	Date and time

Fault recording (SFR)

Number of faults	20
Recording mode	circular
Trigger:	
• Output relays activation (OFF-ON transition)	K1...K6...Kx
• External trigger (binary inputs)	IN1, IN2...INx
• Element pickup (OFF-ON transition)	Start/Trip
Data recorded:	
• Event counter (resettable by ThySetter)	0...10 ⁹
• Fundamental RMS phase currents	$I_{L1r}, I_{L2r}, I_{L3r}$
• Fundamental RMS residual current	I_{Er}
• Event cause	start, trip
• Binary inputs state	IN1, IN2...INx
• Output relays state	K1...K6...Kx
• Fault cause info (operating phase)	L1, L2, L3
• Time stamp	Date and time
Settings recording	
Number of setting changes	8
Recording mode	circular
Data recorded:	
• Setting counter	0...10 ⁹
• Setting data	description and parameter
• Time stamp	Date and time

Digital Fault Recorder (Oscillography)

File format	COMTRADE
Records	depending on setting ⁽¹⁾
Recording mode	circular
Sampling rate	24 per power frequency cycle

Trigger setup:

• Pre-trigger time	0.05...1.00 s
• Post-trigger time	0.05...60.00 s
• Trigger from inputs	IN1, IN2...INx
• Trigger from outputs	K1...K6...K10
• Manual trigger	ThySetter

Data recorded on sampled channels:

• Instantaneous currents	$i_{L1}, i_{L2}, i_{L3}, i_E$
--------------------------	-------------------------------

Data recorded on analog channels (Analog 1...12):

• Frequency	f
• Fundamental RMS phase currents	$I_{L1r}, I_{L2r}, I_{L3r}$
• Fundamental RMS residual current	I_{Er}

Data recorded on digital channels (Digital 1...12):

• Output relays state	K1...K6...K10
• Binary inputs state	IN1, IN2...INx

For instance, with following setting:


• Pre-trigger time	0.25 s
• Post-trigger time	0.25 s
• Sampled channels	$i_{L1}, i_{L2}, i_{L3}, i_E$
• Analog channels	$I_{L1}, I_{L2}, I_{L3}, I_{Er}$
• Digital channels	K1, K2, K3, K4, K5, K6, IN1, IN2

up to five hundred records can be stored when $f = 50$ Hz

Oscillography (DFR)




— Connection diagram example

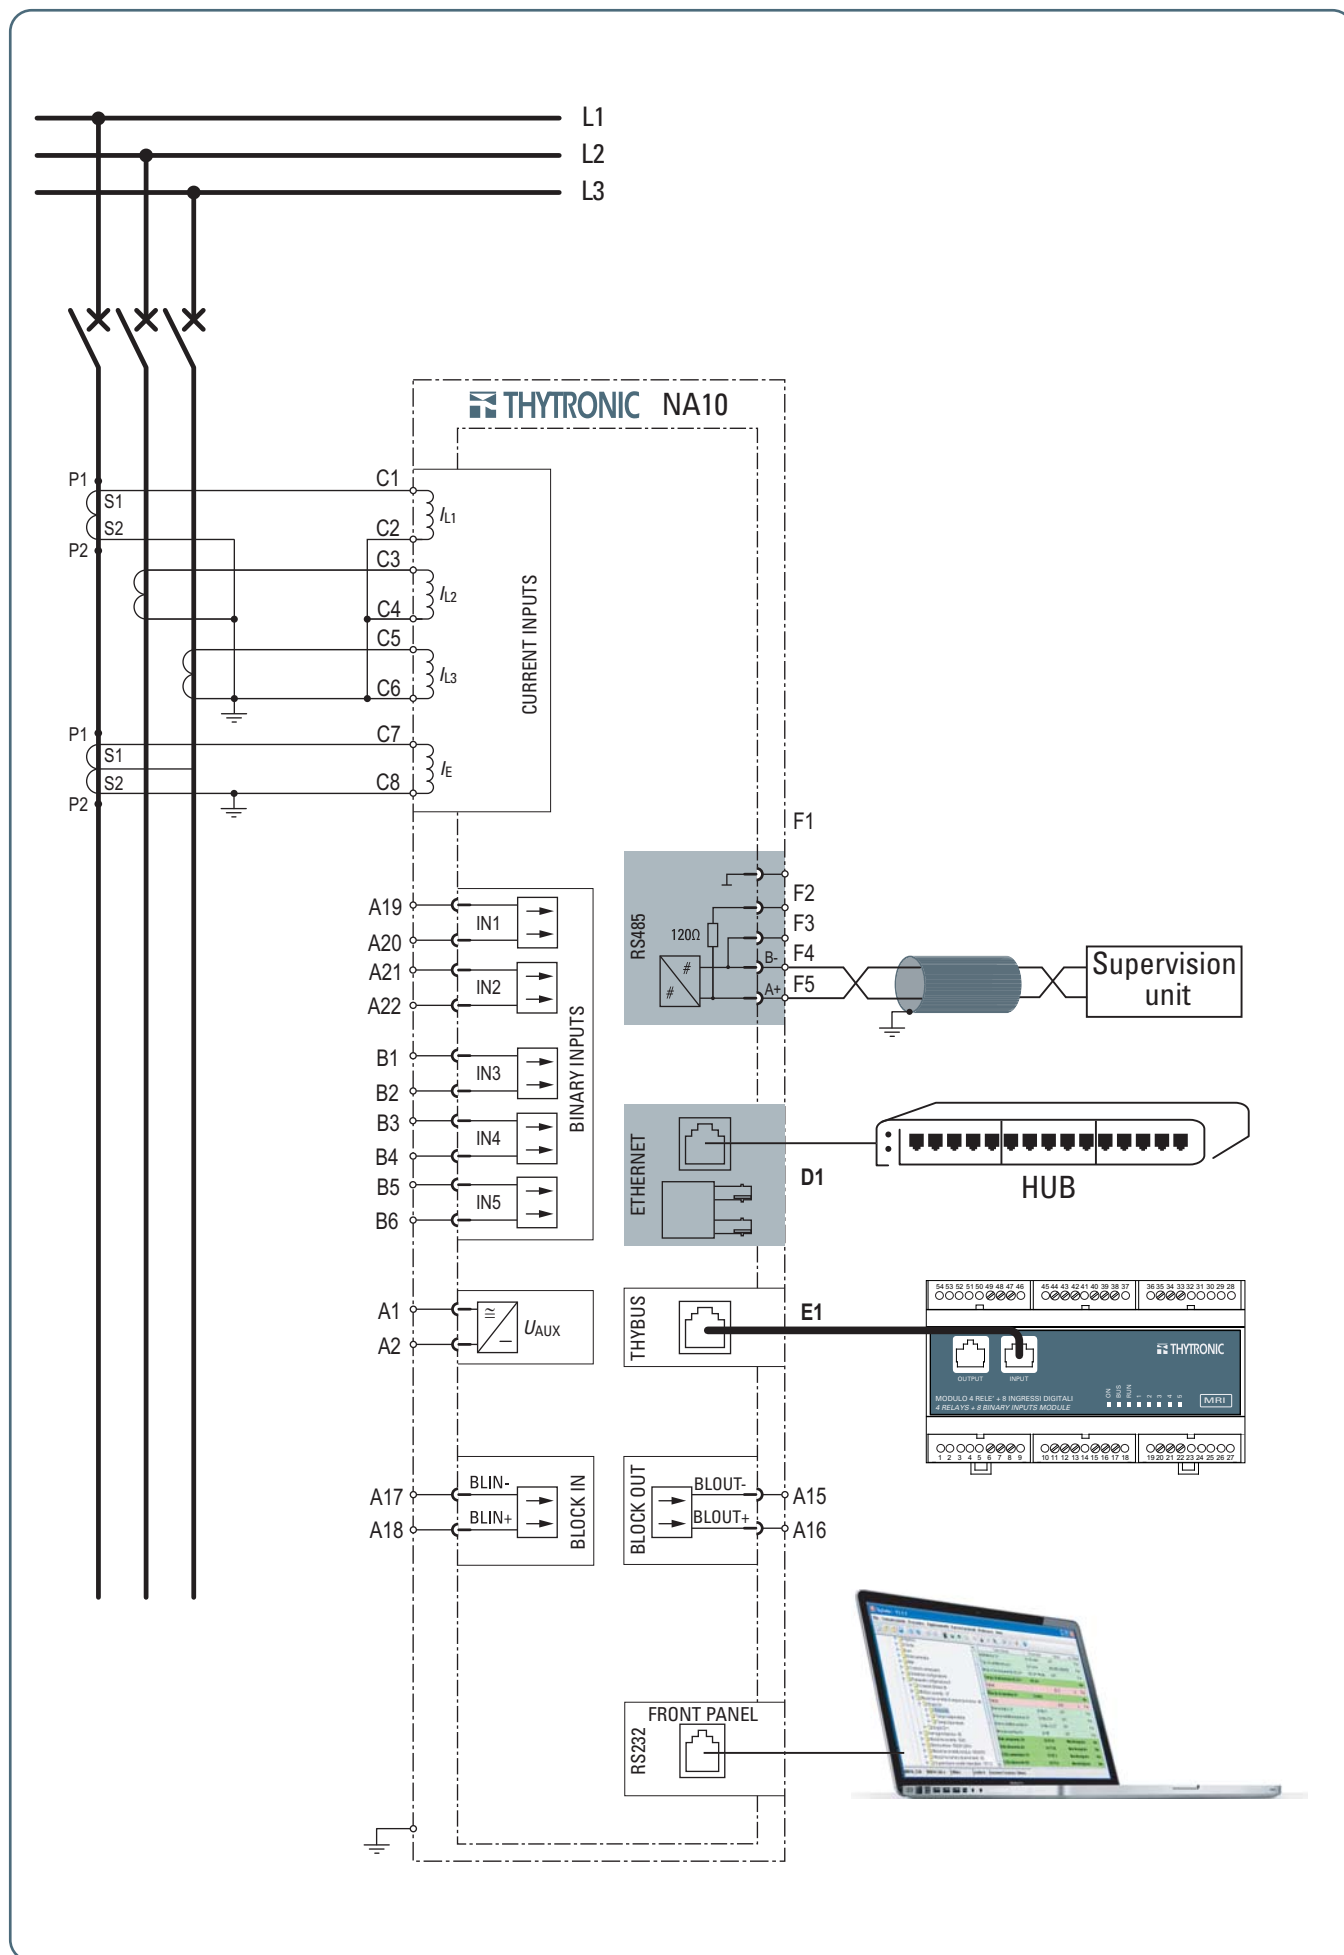


DIMENSIONS

FRONT VIEW

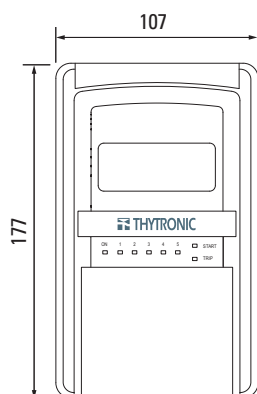


FLUSH MOUNTING

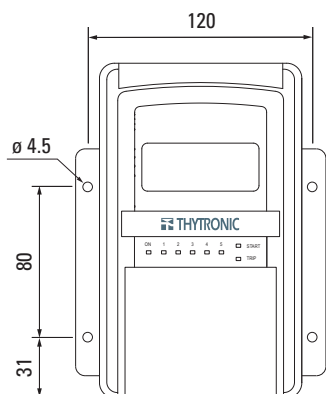


PROJECTING MOUNTING

REAR VIEW

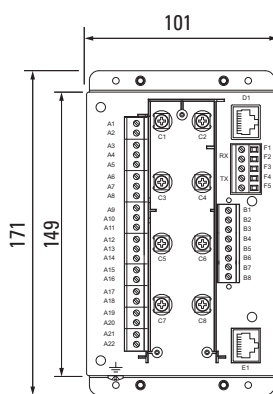


FLUSH MOUNTING

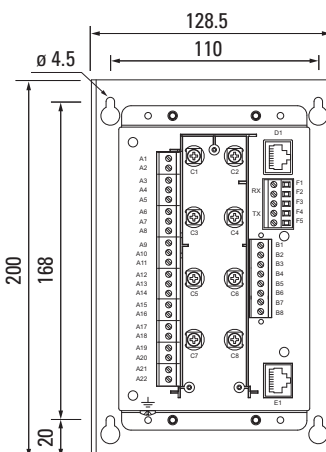


PROJECTING MOUNTING
(Separate operator panel)

SIDE VIEW

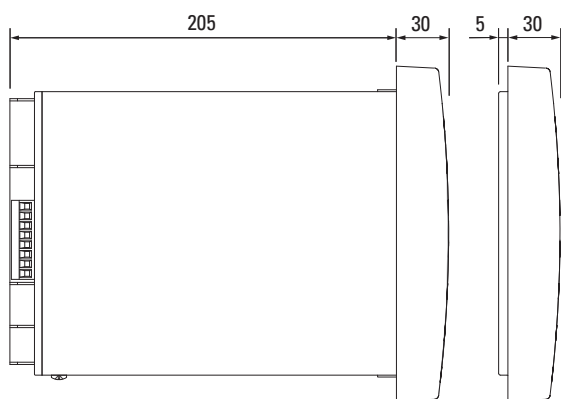


FLUSH MOUNTING

SEPARATE
OPERATOR PANEL

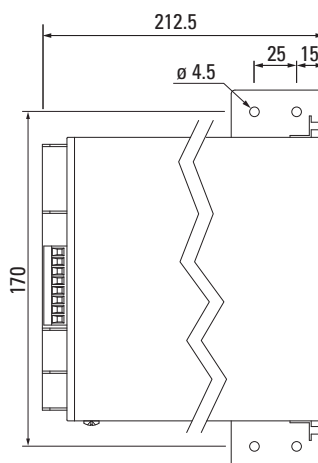


PROJECTING MOUNTING
(Separate operator panel)

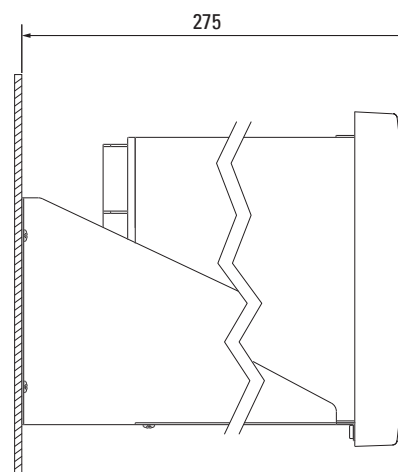

PROJECTING MOUNTING
(Stand alone)

RACK MOUNTING

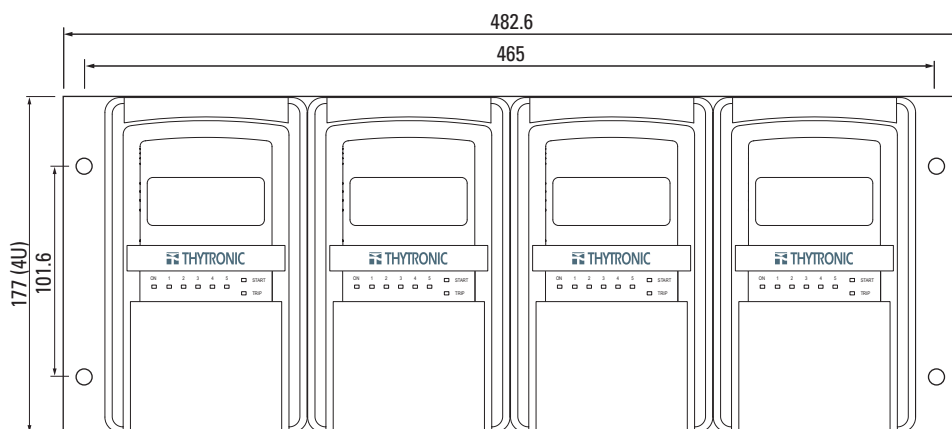

FLUSH MOUNTING CUTOUT

