


Cirrus 60

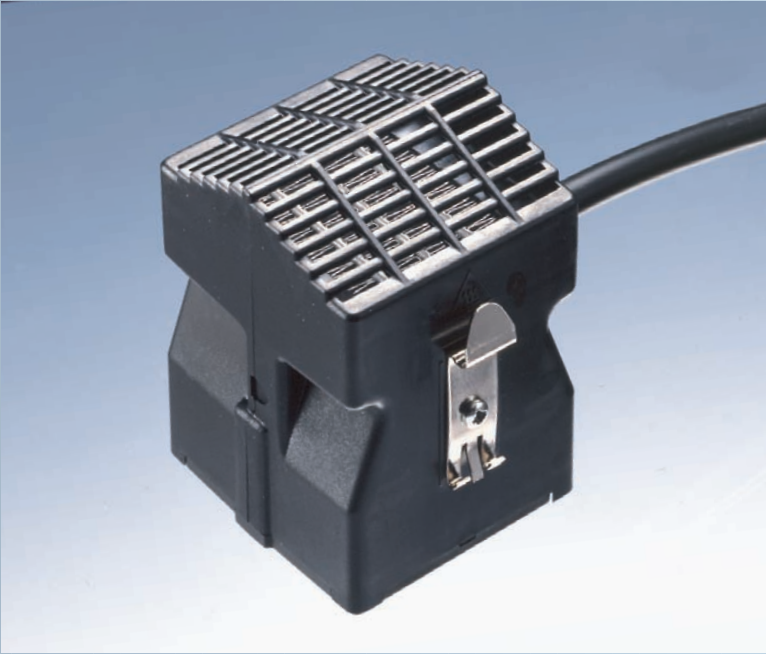

Cirrus 60		FGC 3000	FGC 3001
Nominal Power at 10°C	W	200 / 300 / 400	200 / 300 / 400
Nominal Input Voltage	V	230 VAC	115 VAC
Nominal Input Frequency	Hz	50	60
Operating Temperature Range	°C	-10 to +70°C	-10 to +70°C
Storage Temperature Range	°C	-40 to +70°C	-40 to +70°C
Fan Livetime (MTTF at 30°C)	h	329,447	329,447
Fan Volumetric Flow, approximate	m³/h	10	13
Weight, add 35g for bracket	g	275	275
Dimensions	Cross section mm	71 x 70	71 x 70
	Length mm	96,5	96,5
Harness Length	mm	240	240
Ingress Protection, EN60529		IP 20	IP 20
Electrical Protection Class		II	II
Recommended Fuse, Time Delay	A	6,3	6,3
Recommended MCB Type B	A	6	6

- Features:**
- High power to size ratio
 - Lightweight
 - Easy to fit
 - Three power settings
 - Independent fan circuit to aid climate cooling

- Options:**
- FGB 300: 35mm DIN Rail clip (EN 50022)
 - FGB 301: Side mounting bracket (4 x M4)
 - FGB 302: Bulkhead mounting bracket (4 x M4)



DBK David+Baader GmbH

Components

Rheinstrasse 72 - 74
D - 76870 Kandel

Phone: +49 (0) 72 75 7 03 - 231
Fax: +49 (0) 72 75 7 03 - 249

info@dbk-group.de
www.dbk-components.com