


Unimate Range pitch 5.08

Unimate Range pitch 5.08	Male connectors with solder connection	H.2
	Male connectors with clamping yoke connection	H.10
	Socket connectors with clamping yoke connection	H.12
	Socket connectors with TOP connection	H.14
	Socket connectors with crimp connection	H.16

Male connectors with solder connection

SLA 90

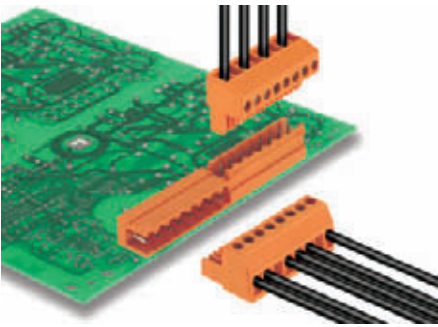

Dimensionally stable, 90° angled, codable 5.08 pitch male connector from the Unimate Range of plugs with integral aid to prevent wrong connections. Available with open or closed ends. Fixing blocks can be attached to the closed end version. The solder pin length of 3.2 mm has been optimised for wave soldering. Supplied in cardboard box.

- 400 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)





Technical data

Rated data to IEC 60664-1 / IEC 61984				
Clamping range, max.	mm ²			
Solid H05(07) V-U	mm ²			
Stranded H07 V-R	mm ²			
Flexible H05(07) V-K	mm ²			
Flexible with ferrule	mm ²			
Ferrule with plastic collar	mm ²			
Stripping length	mm			
Screwdriver blade	mm			
according to norm				
Tightening torque range	Nm			
Rated current at ambient temperature				
	A	20°C	40°C	
		17.5	16	
Overvoltage category				
Pollution severity		III	III	II
		3	2	2
Rated voltage	V	250	320	400
Rated impulse voltage	kV	4	4	4
UL 1059 rated data - E60693				
		B	C	D
Rated voltage	V	300	300	300
Rated current	A	10	10	10
AWG conductor				
CSA C22.2 rated data - LR12400 B				
		B	C	D
Rated voltage	V	300	300	300
Rated current	A	10	10	10
AWG conductor				
Material data				
Type of insulating material		PBT GF		
Flammability class acc. UL94		V-0		
Contact base material		CuSn		
Material of contact surface		tinned		


Information

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section and min. No. of poles.
- P on drg. = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

Derating curve

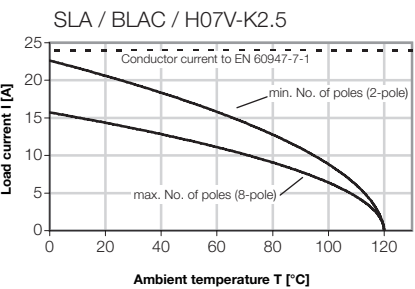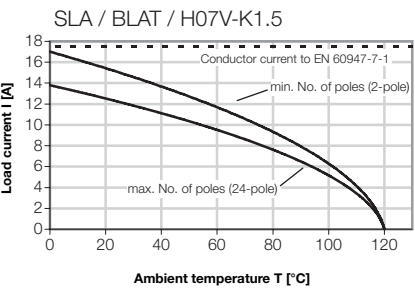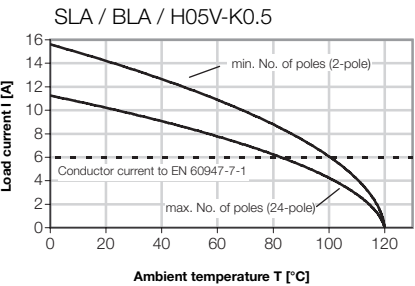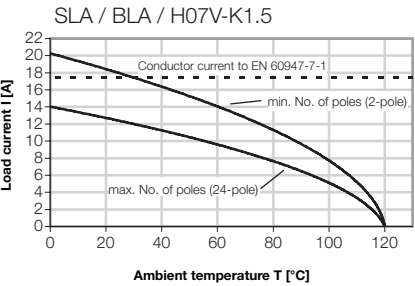

SLA 90


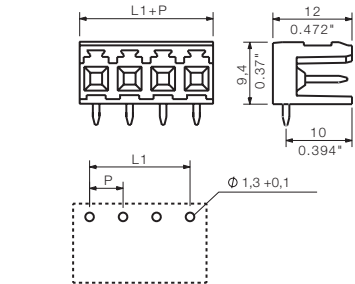


Ordering data

Solder pin length				3.2 mm
Colour				orange
Pitch 5.08 mm				
Poles	L1 mm	(inch)	Qty.	Order No.
2	5.08	(0.200)	100	1238060000
3	10.16	(0.400)	100	1238160000
4	15.24	(0.600)	100	1238260000
5	20.32	(0.800)	50	1238360000
6	25.40	(1.000)	50	1238460000
7	30.48	(1.200)	50	1238560000
8	35.56	(1.400)	50	1238660000
9	40.64	(1.600)	50	1238760000
10	45.72	(1.800)	50	1238860000
11	50.80	(2.000)	50	1238960000
12	55.88	(2.200)	50	1239060000
13	60.96	(2.400)	50	1239160000
14	66.04	(2.600)	50	1239260000
15	71.12	(2.800)	50	1239360000
16	76.20	(3.000)	50	1239460000
17	81.28	(3.200)	20	1271760000
18	86.36	(3.400)	20	1271860000
19	91.44	(3.600)	20	1271960000
20	96.52	(3.800)	20	1272060000
21	101.60	(4.000)	20	1272160000
22	106.68	(4.200)	20	1315960000
23	111.76	(4.400)	20	1316060000
24	116.84	(4.600)	20	1316160000

SLA 90B

Accessories



Possible colors

Additional colours on request



Coding

See chapter accessories

Ordering data

Solder pin length			3.2 mm	
Colour			orange	
Pitch 5.08 mm				
Poles	L1 mm	(inch)	Qty.	Order No.
2	5.08	(0.200)	100	1241060000
3	10.16	(0.400)	100	1241160000
4	15.24	(0.600)	100	1241260000
5	20.32	(0.800)	50	1241360000
6	25.40	(1.000)	50	1241460000
7	30.48	(1.200)	50	1241560000
8	35.56	(1.400)	50	1241660000
9	40.64	(1.600)	50	1241760000
10	45.72	(1.800)	50	1241860000
11	50.80	(2.000)	50	1241960000
12	55.88	(2.200)	50	1242060000
13	60.96	(2.400)	50	1242160000
14	66.04	(2.600)	50	1242260000
15	71.12	(2.800)	50	1242360000
16	76.20	(3.000)	50	1242460000
17	81.28	(3.200)	20	1270260000
18	86.36	(3.400)	20	1270360000
19	91.44	(3.600)	20	1270460000
20	96.52	(3.800)	20	1270560000
21	101.60	(4.000)	20	1270660000
22	106.68	(4.200)	20	1315660000
23	111.76	(4.400)	20	1315760000
24	116.84	(4.600)	20	1315860000




Fixing block

See chapter accessories




Marking strips

See chapter accessories

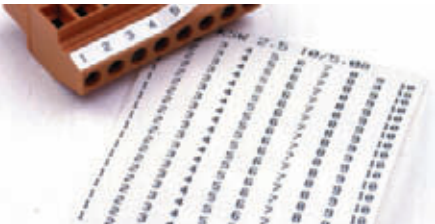

Male connectors with solder connection


SLA 180

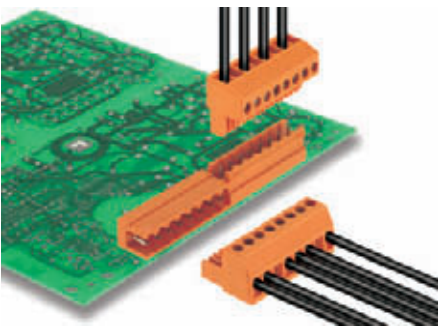


Dimensionally stable, 180° straight 5.08 pitch, codable male connector from the Unimate Range of plugs with integral aid to prevent wrong connections. Available with open or closed ends. Fixing blocks can be attached to the closed end version. The solder pin length of 3.2 mm has been optimised for wave soldering. Supplied in cardboard box.

- 400 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)

Derating curve

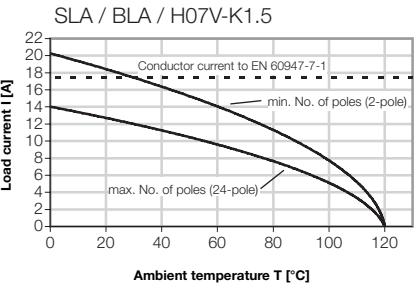

SLA 180



Technical data

Rated data to IEC 60664-1 / IEC 61984				
Clamping range, max.	mm ²			
Solid H05(07) V-U	mm ²			
Stranded H07 V-R	mm ²			
Flexible H05(07) V-K	mm ²			
Flexible with ferrule	mm ²			
Ferrule with plastic collar	mm ²			
Stripping length	mm			
Screwdriver blade	mm			
according to norm				
Tightening torque range	Nm			
Rated current at ambient temperature				
	A	20°C	40°C	
		17.5	16	
Overvoltage category				
Pollution severity		III	III	II
		3	2	2
Rated voltage	V	250	320	400
Rated impulse voltage	kV	4	4	4
UL 1059 rated data - E60693				
		B	C	D
Rated voltage	V	300		300
Rated current	A	10		10
AWG conductor				
CSA C22.2 rated data - LR12400 B				
		B	C	D
Rated voltage	V	300		300
Rated current	A	10		10
AWG conductor				
Material data				
Type of insulating material		PBT GF		
Flammability class acc. UL94		V-0		
Contact base material		CuSn		
Material of contact surface		tinned		

Information


- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section and min. No. of poles.
- P on drg. = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

Ordering data

Solder pin length				3.2 mm
Colour				orange
Pitch 5.08 mm				
Poles	L1 mm	(inch)	Qty.	Order No.
2	5.08	(0.200)	100	1239560000
3	10.16	(0.400)	100	1239660000
4	15.24	(0.600)	100	1239760000
5	20.32	(0.800)	50	1239860000
6	25.40	(1.000)	50	1239960000
7	30.48	(1.200)	50	1240060000
8	35.56	(1.400)	50	1240160000
9	40.64	(1.600)	50	1240260000
10	45.72	(1.800)	50	1240360000
11	50.80	(2.000)	50	1240460000
12	55.88	(2.200)	50	1240560000
13	60.96	(2.400)	50	1240660000
14	66.04	(2.600)	50	1240760000
15	71.12	(2.800)	50	1240860000
16	76.20	(3.000)	50	1240960000
17	81.28	(3.200)	20	1271260000
18	86.36	(3.400)	20	1271360000
19	91.44	(3.600)	20	1271460000
20	96.52	(3.800)	20	1271560000
21	101.60	(4.000)	20	1271660000
22	106.68	(4.200)	20	1315060000
23	111.76	(4.400)	20	1315160000
24	116.84	(4.600)	20	1315260000

SLA 180B

Accessories



Possible colors

Additional colours on request



Coding

See chapter accessories

Ordering data

Solder pin length				3.2 mm
Colour				orange
Pitch 5.08 mm				
Poles	L1 mm	(inch)	Qty.	Order No.
2	5.08	(0.200)	100	1242560000
3	10.16	(0.400)	100	1242660000
4	15.24	(0.600)	100	1242760000
5	20.32	(0.800)	50	1242860000
6	25.40	(1.000)	50	1242960000
7	30.48	(1.200)	50	1243060000
8	35.56	(1.400)	50	1243160000
9	40.64	(1.600)	50	1243260000
10	45.72	(1.800)	50	1243360000
11	50.80	(2.000)	50	1243460000
12	55.88	(2.200)	50	1243560000
13	60.96	(2.400)	50	1243660000
14	66.04	(2.600)	50	1243760000
15	71.12	(2.800)	50	1243860000
16	76.20	(3.000)	50	1243960000
17	81.28	(3.200)	20	1270760000
18	86.36	(3.400)	20	1270860000
19	91.44	(3.600)	20	1270960000
20	96.52	(3.800)	20	1271060000
21	101.60	(4.000)	20	1271160000
22	106.68	(4.200)	20	1315360000
23	111.76	(4.400)	20	1315460000
24	116.84	(4.600)	20	1315560000




Fixing block

See chapter accessories




Marking strips

See chapter accessories

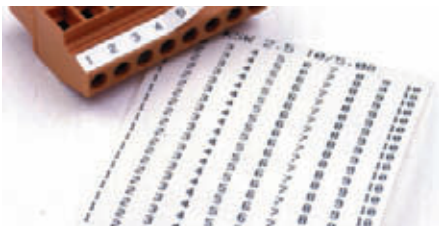

Male connectors with solder connection

SLAD 90

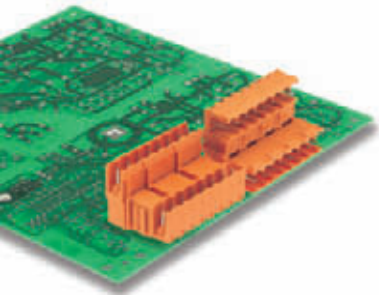



Dimensionally stable, 90° angled, codable, double level 5.08mm pitch male connector from the Uimate Range with integral aid to prevent wrong connections. Available with open or closed ends. Fixing blocks can be attached to the closed end version. The solder pin length of 3.2 mm has been optimised for wave flow soldering process. Supplied in cardboard box.

- 400 V (IEC) / 300 V (UL)
- 10 A (IEC) / 10 A (UL)


Technical data

Rated data to IEC 60664-1 / IEC 61984				
Clamping range, max.	mm²			
Solid H05(07) V-U	mm²			
Stranded H07 V-R	mm²			
Flexible H05(07) V-K	mm²			
Flexible with ferrule	mm²			
Ferrule with plastic collar	mm²			
Stripping length	mm			
Screwdriver blade	mm			
according to norm				
Tightening torque range	Nm			
Rated current at ambient temperature			20°C	40°C
	A	10	8.5	
Overvoltage category		III	III	II
Pollution severity		3	2	2
Rated voltage	V	250	320	400
Rated impulse voltage	kV	4	4	4
UL 1059 rated data - E60693		B	C	D
Rated voltage	V	300	300	
Rated current	A	10	10	
AWG conductor				
CSA C22.2 rated data - LR12400 B		B	C	D
Rated voltage	V	300	300	
Rated current	A	7	7	
AWG conductor				
Material data				
Type of insulating material		PBT GF		
Flammability class acc. UL94		V-0		
Contact base material		CuSn		
Material of contact surface		tinned		
Information				

Derating curve

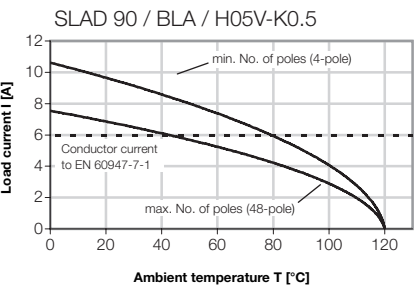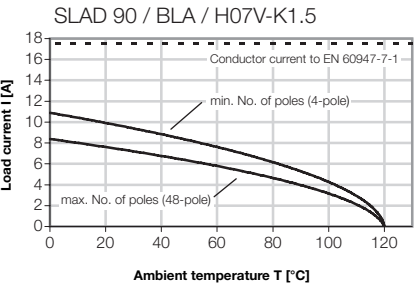


SLAD 90



Ordering data

Solder pin length				3.2 mm
Colour				orange
Pitch 5.08 mm				
Poles	L1 mm	(inch)	Qty.	Order No.
4	5.08	(0.200)	50	1320060000
6	10.16	(0.400)	50	1320160000
8	15.24	(0.600)	50	1372460000
10	20.32	(0.800)	50	1372560000
12	25.40	(1.000)	50	1372660000
14	30.48	(1.200)	20	1372760000
16	35.56	(1.400)	20	1372860000
18	40.64	(1.600)	20	1372960000
20	45.72	(1.800)	20	1373060000
22	50.80	(2.000)	10	1373160000
24	55.88	(2.200)	10	1373260000
26	60.96	(2.400)	10	1373360000
28	66.04	(2.600)	10	1373460000
30	71.12	(2.800)	10	1373560000
32	76.20	(3.000)	10	1373660000
34	81.28	(3.200)	10	1373760000
36	86.36	(3.400)	10	1373860000
38	91.44	(3.600)	10	1373960000
40	96.52	(3.800)	10	1374060000
42	101.60	(4.000)	10	1374160000
44	106.68	(4.200)	10	1374260000
46	111.76	(4.400)	10	1374360000
48	116.84	(4.600)	10	1374460000

SLAD 90B



Ordering data

Solder pin length			3.2 mm		
Colour			orange		
Pitch 5.08 mm					
Poles:	1 mm	(inch)	Qty.	Order No.	Order No.
4	5.08	(0.200)	50		1320660000
6	10.16	(0.400)	50		1320760000
8	15.24	(0.600)	50		1388560000
10	20.32	(0.800)	50		1388660000
12	25.40	(1.000)	50		1388760000
14	30.48	(1.200)	20		1388860000
16	35.56	(1.400)	20		1388960000
18	40.64	(1.600)	20		1389060000
20	45.72	(1.800)	20		1389160000
22	50.80	(2.000)	10		1389260000
24	55.88	(2.200)	10		1389360000
26	60.96	(2.400)	10		1390660000
28	66.04	(2.600)	10		1390760000
30	71.12	(2.800)	10		1390860000
32	76.20	(3.000)	10		1390960000
34	81.28	(3.200)	10		1391060000
36	86.36	(3.400)	10		1391160000
38	91.44	(3.600)	10		1391260000
40	96.52	(3.800)	10		1391360000
42	101.60	(4.000)	10		1391460000
44	106.68	(4.200)	10		1391560000
46	111.76	(4.400)	10		1391660000
48	116.84	(4.600)	10		1391760000

Accessories

Possible colors

Additional colours on request



Coding

See chapter accessories



Disconnection element

See chapter accessories




Fixing block

See chapter accessories




Marking strips

See chapter accessories

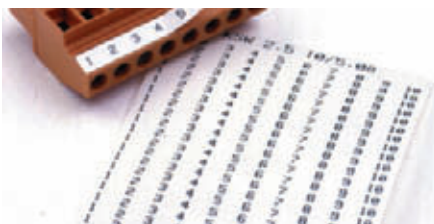

Male connectors with solder connection


SLAD 180

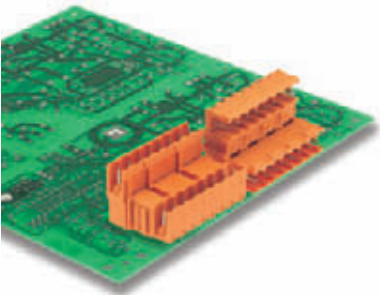

Dimensionally stable, 180° straight, codable, double level, 5.08 pitch male connector from the Uimate Range of plugs with integral aid to prevent wrong connections. Available with open or closed ends. Fixing blocks can be attached to the closed end version. The solder pin length of 3.2 mm has been optimised for wave soldering. Supplied in cardboard box.

- 400 V (IEC) / 300 V (UL)
- 10 A (IEC) / 10 A (UL)


Derating curve

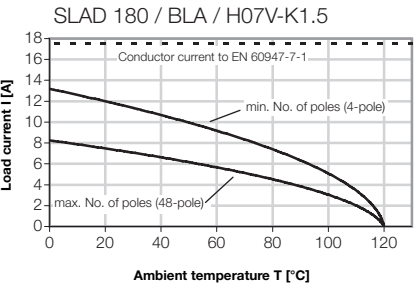

Technical data

Rated data to IEC 60664-1 / IEC 61984				
Clamping range, max.	mm²			
Solid H05(07) V-U	mm²			
Stranded H07 V-R	mm²			
Flexible H05(07) V-K	mm²			
Flexible with ferrule	mm²			
Ferrule with plastic collar	mm²			
Stripping length	mm			
Screwdriver blade	mm			
according to norm				
Tightening torque range	Nm			
Rated current at ambient temperature		20°C	40°C	
	A	10	8.5	
Overvoltage category		III	III	II
Pollution severity		3	2	2
Rated voltage	V	250	320	400
Rated impulse voltage	kV	4	4	4
UL 1059 rated data - E60693		B	C	D
Rated voltage	V	300	300	
Rated current	A	10	10	
AWG conductor				
CSA C22.2 rated data - LR12400 B		B	C	D
Rated voltage	V	300	300	
Rated current	A	7	7	
AWG conductor				
Material data		PBT GF V-0 CuSn tinned		
Type of insulating material				
Flammability class acc. UL94				
Contact base material				
Material of contact surface				
Information				


SLAD 180



Ordering data

Solder pin length				3.2 mm
Colour				orange
Pitch 5.08 mm				
Poles	L1 mm	(inch)	Qty.	Order No.
4	5.08	(0.200)	50	1320860000
6	10.16	(0.400)	50	1320960000
8	15.24	(0.600)	50	1374560000
10	20.32	(0.800)	50	1374660000
12	25.40	(1.000)	50	1374760000
14	30.48	(1.200)	20	1374860000
16	35.56	(1.400)	20	1374960000
18	40.64	(1.600)	20	1375060000
20	45.72	(1.800)	20	1375160000
22	50.80	(2.000)	10	1375260000
24	55.88	(2.200)	10	1375360000
26	60.96	(2.400)	10	1375460000
28	66.04	(2.600)	10	1375560000
30	71.12	(2.800)	10	1375660000
32	76.20	(3.000)	10	1375760000
34	81.28	(3.200)	10	1375860000
36	86.36	(3.400)	10	1375960000
38	91.44	(3.600)	10	1376060000
40	96.52	(3.800)	10	1376160000
42	101.60	(4.000)	10	1376260000
44	106.68	(4.200)	10	1376360000
46	111.76	(4.400)	10	1376460000
48	116.84	(4.600)	10	1376560000

SLAD 180B



Ordering data

Solder pin length			3.2 mm		
Colour			orange		
Pitch 5.08 mm					
Poles	L1 mm	(inch)	Qty.	Order No.	Order No.
4	5.08	(0.200)	50		1321460000
6	10.16	(0.400)	50		1321560000
8	15.24	(0.600)	50		1392760000
10	20.32	(0.800)	50		1392860000
12	25.40	(1.000)	50		1392960000
14	30.48	(1.200)	20		1393060000
16	35.56	(1.400)	20		1393160000
18	40.64	(1.600)	20		1393260000
20	45.72	(1.800)	20		1393360000
22	50.80	(2.000)	10		1393460000
24	55.88	(2.200)	10		1393560000
26	60.96	(2.400)	10		1394860000
28	66.04	(2.600)	10		1394960000
30	71.12	(2.800)	10		1395060000
32	76.20	(3.000)	10		1395160000
34	81.28	(3.200)	10		1395260000
36	86.36	(3.400)	10		1395360000
38	91.44	(3.600)	10		1395460000
40	96.52	(3.800)	10		1395560000
42	101.60	(4.000)	10		1395660000
44	106.68	(4.200)	10		1395760000
46	111.76	(4.400)	10		1395860000
48	116.84	(4.600)	10		1395960000

Accessories

Possible colors

Additional colours on request



Coding

See chapter accessories



Disconnection element

See chapter accessories




Fixing block

See chapter accessories




Marking strips

See chapter accessories

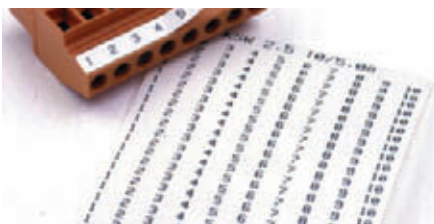

SLAS B with RF15



Ordering data

Solder pin length


Colour

orange

Pitch 5.08 mm

Poles	1 mm	(inch)	Qty.	Order No.	Order No.
4	15.24	(0.600)	20	1845900000	
6	25.40	(1.000)	20	1845910000	
8	35.56	(1.400)	10	1845920000	
10	45.72	(1.800)	10	1845930000	
12	55.88	(2.200)	10	1845940000	
16	76.20	(3.000)	5	1845950000	
20	96.52	(3.800)	5	1763310000	
24	116.84	(4.600)	5	1845960000	

SLAS B with KF



Ordering data

Solder pin length

Colour

orange

Pitch 5.08 mm

Poles	L mm	(inch)	Qty.	Order No.	Order No.
20	96.52	(3.800)	5	1766140000	

Accessories

Coding

See chapter accessories




Fixing block

See chapter accessories



Marking strips

See chapter accessories

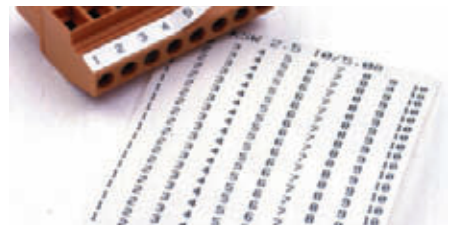


Screwdriver

See chapter accessories

Order No. 9008390000



BLA

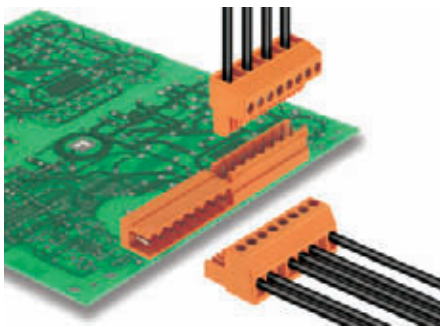

Socket connectors offering 5.08 pitch clamping yoke technology. The principle of the vibration-proof screw connection and the Unimate Range 5.08 pitch pin arrangement provides a unique security during operation. Also available with dovetail (B) for convenient attachment of fixing blocks. The BLA has a labelling panel and can be coded. Supplied in cardboard box.

- 0.20 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)





Technical data

Rated data to IEC 60664-1 / IEC 61984			
Clamping range, max.	mm ²	0.13...3.31	
Solid H05(07) V-U	mm ²	0.2...2.5	
Stranded H07 V-R	mm ²		
Flexible H05(07) V-K	mm ²	0.2...1.5	
Flexible with ferrule	mm ²	0.2...1.5	
Ferrule with plastic collar	mm ²	0.2...1.5	
Stripping length	mm	7	
Screwdriver blade	mm	0.6 x 3.5	
according to norm		DIN 5264	
Tightening torque range	Nm	0.4...0.5	
Rated current at ambient temperature			
	A	20°C	40°C
		17.5	16
Overvoltage category			
		III	III
Pollution severity			
		3	2
		2	2
Rated voltage	V	250	320
Rated impulse voltage	kV	4	4
		4	4
UL 1059 rated data - E60693			
		B	C
Rated voltage	V	300	300
Rated current	A	10	10
AWG conductor		26-12	
CSA C22.2 rated data - LR12400 B			
		B	C
Rated voltage	V	300	300
Rated current	A	10	10
AWG conductor		26-12	
Material data			
Type of insulating material		PBT GF	
Flammability class acc. UL94		V-0	
Contact base material		CuSn	
Material of contact surface		tinned	


Information

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section and min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228 pt 1
- Wire end ferrule with plastic collar to DIN 46228 pt 4
- P on drg. = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

Derating curve

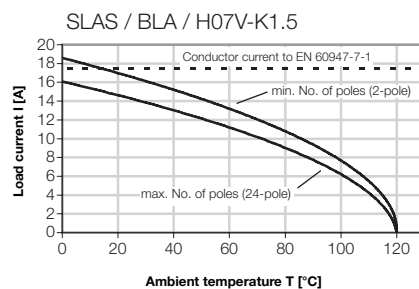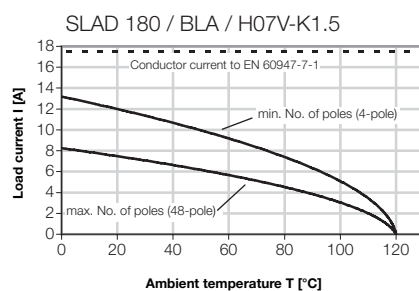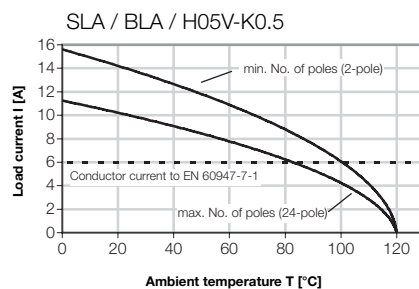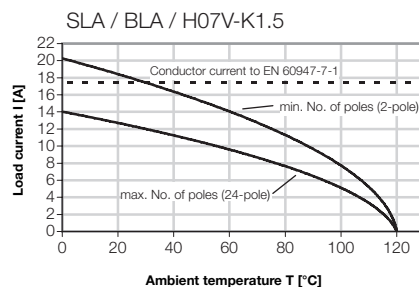

BLA




Ordering data

Solder pin length					
Colour					
orange					
Pitch 5.08 mm					
Poles	L1 mm	(inch)	Qty.	Order No.	Order No.
2	5.08	(0.200)	100	1281760000	
3	10.16	(0.400)	100	1281860000	
4	15.24	(0.600)	100	1281960000	
5	20.32	(0.800)	50	1282060000	
6	25.40	(1.000)	50	1282160000	
7	30.48	(1.200)	50	1282260000	
8	35.56	(1.400)	50	1282360000	
9	40.64	(1.600)	50	1282460000	
10	45.72	(1.800)	50	1282560000	
11	50.80	(2.000)	50	1282660000	
12	55.88	(2.200)	50	1282760000	
13	60.96	(2.400)	50	1282860000	
14	66.04	(2.600)	50	1282960000	
15	71.12	(2.800)	50	1283060000	
16	76.20	(3.000)	50	1283160000	
17	81.28	(3.200)	20	1283260000	
18	86.36	(3.400)	20	1283360000	
19	91.44	(3.600)	20	1283460000	
20	96.52	(3.800)	20	1283560000	
21	101.60	(4.000)	20	1283660000	
22	106.68	(4.200)	20	1314260000	
23	111.76	(4.400)	20	1314360000	
24	116.84	(4.600)	20	1314460000	

BLA B

Accessories



Possible colors
Additional colours on request



Coding
See chapter accessories



Ordering data

Solder pin length


Colour orange

Poles	L1 mm	(inch)	Qty.	Order No.	Order No.
2	5.08	(0.200)	100	1356060000	
3	10.16	(0.400)	100	1356160000	
4	15.24	(0.600)	100	1356260000	
5	20.32	(0.800)	50	1356360000	
6	25.40	(1.000)	50	1356460000	
7	30.48	(1.200)	50	1356560000	
8	35.56	(1.400)	50	1356660000	
9	40.64	(1.600)	50	1356760000	
10	45.72	(1.800)	50	1356860000	
11	50.80	(2.000)	50	1356960000	
12	55.88	(2.200)	50	1357060000	
13	60.96	(2.400)	50	1357160000	
14	66.04	(2.600)	50	1357260000	
15	71.12	(2.800)	50	1357360000	
16	76.20	(3.000)	50	1357460000	
17	81.28	(3.200)	20	1357560000	
18	86.36	(3.400)	20	1357660000	
19	91.44	(3.600)	20	1357760000	
20	96.52	(3.800)	20	1357860000	
21	101.60	(4.000)	20	1357960000	
22	106.68	(4.200)	20	1358060000	
23	111.76	(4.400)	20	1358160000	
24	116.84	(4.600)	20	1358260000	

Fixing block
See chapter accessories




Marking strips
See chapter accessories

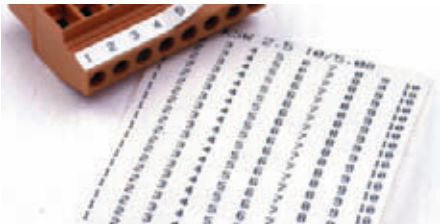

Screwdriver
See chapter accessories
Order No. 9008390000



BLAT B



Accessories

Possible colors

Additional colours on request



Coding

See chapter accessories




Fixing block

See chapter accessories



Marking strips

See chapter accessories

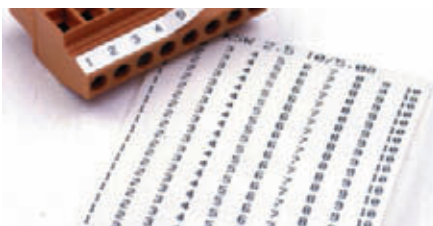

Screwdriver

See chapter accessories
Order No. 9008390000



Ordering data

Solder pin length



Colour	orange
--------	--------

Pitch 5.08 mm

Poles	L1 mm	(inch)	Qty.	Order No.	Order No.
2	5.08	(0.200)	100	1486560000	
3	10.16	(0.400)	100	1486660000	
4	15.24	(0.600)	100	1486760000	
5	20.32	(0.800)	50	1486860000	
6	25.40	(1.000)	50	1486960000	
7	30.48	(1.200)	50	1487060000	
8	35.56	(1.400)	50	1487160000	
9	40.64	(1.600)	50	1487260000	
10	45.72	(1.800)	50	1487360000	
11	50.80	(2.000)	50	1487460000	
12	55.88	(2.200)	50	1487560000	
13	60.96	(2.400)	50	1487660000	
14	66.04	(2.600)	50	1487760000	
15	71.12	(2.800)	50	1487860000	
16	76.20	(3.000)	50	1487960000	
17	81.28	(3.200)	20	1488060000	
18	86.36	(3.400)	20	1488160000	
19	91.44	(3.600)	20	1488260000	
20	96.52	(3.800)	20	1488360000	
21	101.60	(4.000)	20	1488460000	
22	106.68	(4.200)	20	1488560000	
23	111.76	(4.400)	20	1488660000	
24	116.84	(4.600)	20	1488760000	

Weidmüller

BLAC BR



Accessories

Possible colors

Additional colours on request



Coding

See chapter accessories




Fixing block

See chapter accessories



Marking strips

See chapter accessories

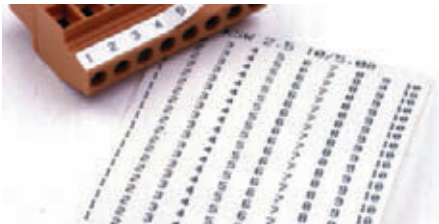

Crimping tool

See chapter accessories



DFFC - crimp contact



Ordering data

supplied as separate contacts, tinned

for cable size	Qty.	Order No.
0.22 – 0.35 mm ² / 24 – 22 AWG	250	1604230000
0.50 – 1.00 mm ² / 20 – 17 AWG	250	1567060000
1.50 – 2.50 mm ² / 16 – 14 AWG	250	1567070000

Ordering data

supplied on a strip, tinned

for cable size	Qty.	Order No.
0.22 – 0.35 mm ² / 24 – 22 AWG	3000	1604230000
0.50 – 1.00 mm ² / 20 – 17 AWG	3000	1480000000
1.50 – 2.50 mm ² / 16 – 14 AWG	3000	1480100000

Ordering data

Solder pin length

Colour orange

Pitch 5.08 mm

Poles	L1 mm	(inch)	Qty.	Order No.	Order No.
2	5.08	(0.200)	100	1578230000	
3	10.16	(0.400)	100	1478860000	
4	15.24	(0.600)	100	1478960000	
5	20.32	(0.800)	50	1444160000	
6	25.40	(1.000)	50	1479060000	
7	30.48	(1.200)	50	1577430000	
8	35.56	(1.400)	50	1479160000	
9	40.64	(1.600)	50	1577420000	
10	45.72	(1.800)	50	1479260000	
11	55.88	(2.200)	50	1577410000	
12	55.88	(2.200)	50	1479360000	
13	60.96	(2.400)	50	1601280000	
14	66.04	(2.600)	50	1594170000	
15	71.12	(2.800)	50	1601290000	
16	76.20	(3.000)	50	1479460000	
17	81.28	(3.200)	20	1601300000	
18	86.36	(3.400)	20	1601310000	
19	91.44	(3.600)	20	1601320000	
20	96.52	(3.800)	20	1479560000	
21	101.60	(4.000)	20	1601330000	
22	106.68	(4.200)	20	1601340000	
23	111.76	(4.400)	20	1601350000	
24	116.84	(4.600)	20	1479660000	

