



SWITCH FUSES 16-32 A

TECHNICAL DATA FOR KKV SERIES

Fuse Switch Disconnectors		16 A	25 A	32 A
Rated insulation voltage, U_i (V)		690	690	690
Rated thermal current, I_{th} (A)		16	25	32
Nominal values with cable size (mm ²)		2,5	4	6
Rated operational current, I_e (A)				
AC-21	400/415V	16	25	32
	500V	16	25	32
	690V	16	25	32
AC-22	400/415V	16	25	32
	500V	16	25	32
	690V	16	25	32
AC-23	400/415V	16	25	32
	500V	16	25	32
	690V	16	25	32
Rated operational power for 3-phase (1500 r.p.m.) squirrel cage induction motors (kW)				
AC-23	400/415V	7,5	11	15
	500V	7,5	15	22
	690V	11	22	30
Rated fused short circuit current				
Back-up fuse (A)		63	63	63
R.M.S. value, I_k (A)		50	50	50
Peak value (kA)		7,2	7,2	7,2
Rated short circuit making capacity, I_{cm} (kA)				
690V		2,5	2,5	2,5
Rated short time withstand current (1 s), I_{cw} (kA)				
690V		1,7	1,7	1,7
Rated breaking capacity, I_{cn} (A)				
AC-23	400/415V	128	200	256
	500V	128	200	256
	690V	128	200	256
Electrical endurance (number of operations)		3000	3000	3000
Mechanical endurance (number of operations)		50000	50000	50000
Terminals / Bolt size Cu (mm ²)		1,5-16	1,5-16	1,5-16
Max terminal torque (Nm)		1,8	1,8	1,8

SWITCH FUSES 16-32 A KKV SERIES

- Available as 3-pole and 4-pole
- Consists of KU switch and KV 10 x 38 fuse holder
- Compatible with handles LK10 and LK11
- Shafts L=100/200/300 AD11 and L=100/200/300 AD11/VT

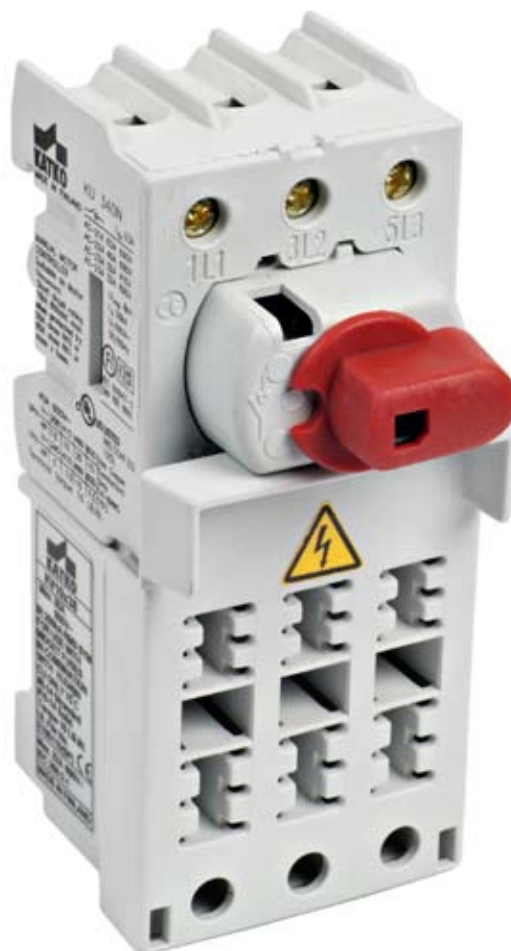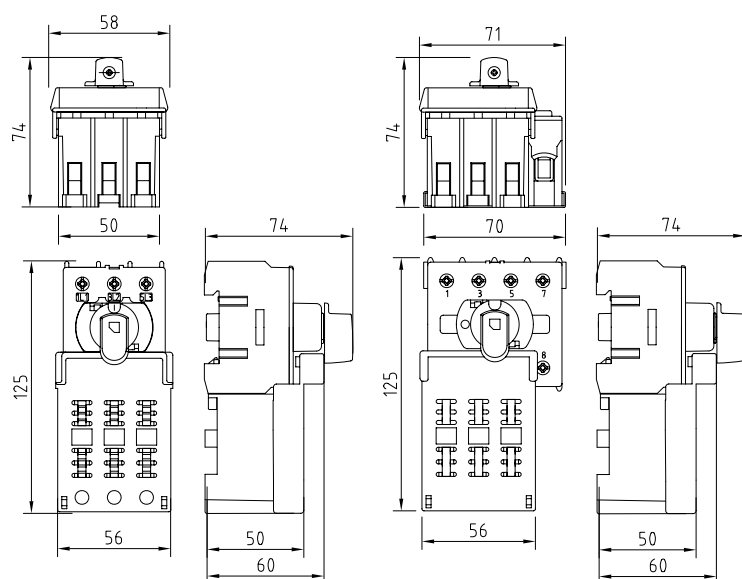

Type	400 V AC-21 415 V 690 V	400 V AC-22 415 V 690 V	AC-23	400 V 415 V	AC-23	690 V	EAN-Code	Weight kg
	I _e / A	I _e / A	I _e / A	P / kW	I _e / A	P / kW		
3-pole								
KKV 316	16 A	16 A	16 A	7,5 kW	16 A	11 kW	6419410212608	0,32
KKV 325	25 A	25 A	25 A	11 kW	25 A	22 kW	6419410212707	0,32
KKV 332	32 A	32 A	32 A	15 kW	32 A	30 kW	6419410212806	0,32
4-pole								
KKV 416	16 A	16 A	16 A	7,5 kW	16 A	11 kW	6419410212653	0,36
KKV 425	25 A	25 A	25 A	11 kW	25 A	22 kW	6419410212752	0,36
KKV 432	32 A	32 A	32 A	15 kW	32 A	30 kW	6419410212851	0,36